


MXZ-VAHZ SERIES

New hyper-heating MXZ allows you to create an oasis of comfort throughout your home and office in the rooms you use most, any time of the year.



Standard rated heating capacity is maintained even when the outside-air temperature drops to -15°C .

Maintains high capacity output even when outside-air temperature is low.

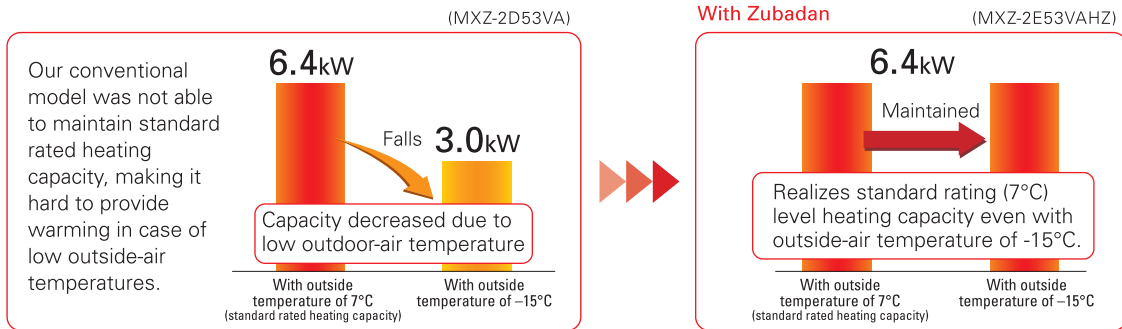

Can operate at outside-air temperature of -25°C

1. Incorporated key parts resistant to cold of up to -25°C after rigorous selection.
2. Printed circuit board-core of the air conditioner—is coated on both sides to protect it in harsh environments.

Freeze-prevention heater standard equipment

Prevents capacity loss and operation from stopping due to drain water freezing.

Drain water **freezes** after operation in the harsh cold




With Hyper heating Does not freeze!




Continuous heating for long periods

Wasteful defrosting operation suppressed to enable more comfortable long-term continuous heating.

Extremely cold outside

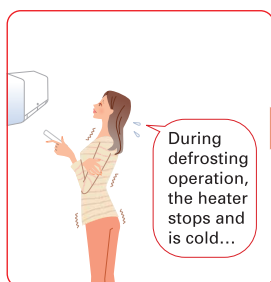

With Zubadan

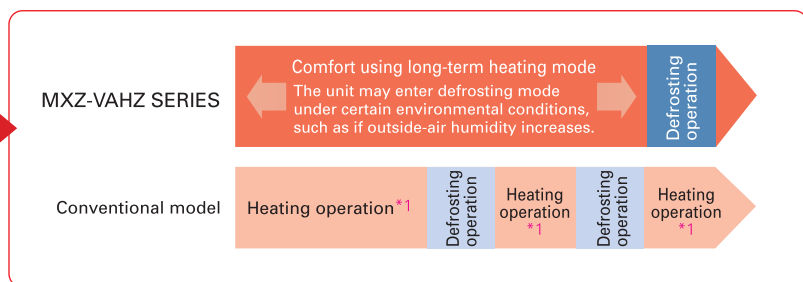


*1: Conventional model performs continuous heating approximately 30min up to a maximum of 90min.

One outdoor unit supports multiple indoor units.

With MXZ-VAHZ, one outdoor unit can cool and heat up to six rooms. They can be installed neatly in sites with limited space such as condominium balconies.

*Please note that cooling and heating modes cannot be run simultaneously in different rooms.

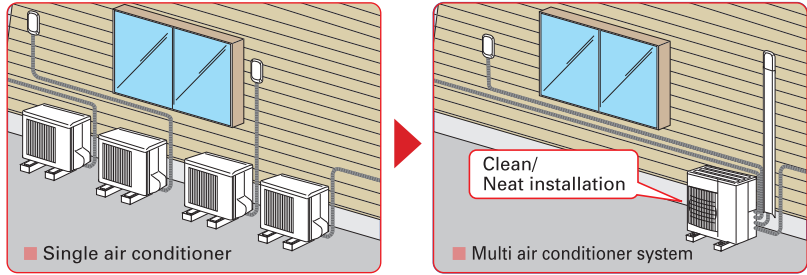



EXAMPLE SYSTEM

MXZ-4E83VAHZ system



Freedom of combinations in cold region greatly enhanced

The variety of indoor unit connection options in cold regions, restricted until now, has been greatly increased. Increased design freedom.

OUTDOOR UNITS	
2-room use  MXZ-2E53VAHZ	4-room use  MXZ-4E83VAHZ

INDOOR UNITS			
Wall-mounted  MSZ-FH  MSZ-EF  MSZ-SF  MSZ-GF	Floor-standing  MFZ-KJ	Cassette  SLZ-KF  MLZ-KA  PLA *1	Ceiling-suspended *1  PCA Ceiling-concealed  SEZ-KD *1  PEAD

*1: P series cannot be connect with MXZ-4E83VAHZ when ampere limit adjustment function is operated.