

MSZ-LN R32

Premium Wall Mounted System

Inverter Heat Pump



Ruby Red (R)



Onyx Black (B)



Pearl White (V)



Natural White (W)



The **MSZ-LN** range is our flagship wall mounted system, that blends energy efficiency with a sophisticated streamlined design. Finished with a choice of four rich colours and a premium quality feel, this range features the latest product innovations, all designed to enhance the user experience, and is an excellent choice for residential or small commercial applications.

Key Features & Benefits

- Built-in Plasma Quad Technology neutralises viruses, bacteria, allergens, PM2.5, mould and dust, inhibiting 99.8% of SARS-CoV-2*
- 3D i-see sensor provides energy efficient, customised comfort by automatically monitoring room occupancy, position and body temperatures
- Built in Wi-Fi interface enables system control & monitoring via the Mitsubishi Electric MELCloud app; plus voice control - compatible with Amazon Alexa or Google Assistant-enabled devices
- Dual-Barrier Coating to the heat exchanger, fan and air duct prevents dust and grease accumulation
- Energy efficient, ultra-quiet operation with a choice of fan speeds
- User-friendly backlit controller for remote operation, including scheduling options



MSZ-LN - INDOOR UNITS		MSZ-LN18VG2 R/B/V/W	MSZ-LN25VG2 R/B/V/W	MSZ-LN35VG2 R/B/V/W	MSZ-LN50VG2 R/B/V/W	MSZ-LN60VG2 R/B/V/W
CAPACITY (KW)	Heating (nominal)	2.0 (0.9 - 4.0)	3.2 (0.8 - 5.4)	4.0 (1.0 - 6.3)	6.0 (1.0 - 8.2)	6.8 (1.8 - 9.3)
	Cooling (nominal)	1.8 (0.9 - 3.0)	2.5 (1.0 - 3.5)	3.5 (0.8 - 4.0)	5.0 (1.0 - 6.0)	6.1 (1.4 - 6.9)
	Heating (UK)	-	2.64 (0.66 - 4.45)	3.3 (0.83 - 5.2)	4.94 (0.82 - 6.75)	5.6 (1.48 - 7.66)
	Cooling (UK)	-	2.48 (0.99 - 3.47)	3.47 (0.79 - 3.96)	4.95 (0.99 - 5.94)	6.05 (1.38 - 6.84)
SHF (nominal)	-	0.97	0.90	0.77	0.75	
COP / EER (nominal)	-	5.52 / 5.15	5.00 / 4.27	4.05 / 3.62	3.76 / 3.41	
SCOP / SEER (BS EN14825)	-	5.2 / 10.5	5.1 / 9.5	4.6 / 8.5	4.6 / 7.5	
ErP ENERGY EFFICIENCY CLASS	Heating/Cooling	-	A+++ / A+++	A+++ / A+++	A++ / A+++	A+ / A++
AIRFLOW (l/s)	Heating (SLo-Lo-Mi-Hi-SHi)	67-95-118-142-240	67-95-118-142-240	71-97-118-142-228	90-107-142-178-262	110-158-192-227-262
	Cooling (SLo-Lo-Mi-Hi-SHi)	71-97-118-147-198	71-97-118-147-198	71-97-118-147-213	95-127-148-177-232	118-147-177-212-262
PIPE SIZE MM (in)	Gas	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	12.7 (1/2")
	Liquid	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")
SOUND PRESSURE LEVEL (dBA)	Heating (SLo-Lo-Mi-Hi-SHi)	19-24-29-36-45	19-24-29-36-45	19-24-29-36-45	25-29-34-39-47	29-37-41-45-49
	Cooling (SLo-Lo-Mi-Hi-SHi)	19-23-29-36-42	19-23-29-36-42	19-24-29-36-43	27-31-35-39-46	29-37-41-45-49
SOUND POWER LEVEL (dBA)		58	58	58	60	65
DIMENSIONS (mm)	Width x Depth x Height	890 x 233 x 307	890 x 233 x 307	890 x 233 x 307	890 x 233 x 307	890 x 233 x 307
WEIGHT (kg)		15.5	15.5	15.5	15.5	15.5
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6	6	6	6	6
INTERCONNECTING CABLE No. CORES		4	4	4	4	4

Notes: MSZ-LN18VG2 only available with R32 MXZ Multi-Split outdoor units. Ruby Red (R), Onyx Black (B), Pearl White (V), Natural White (W).

MUZ-LN - OUTDOOR UNITS		MULTI-SPLIT ONLY	MUZ-LN25VG2	MUZ-LN35VG2	MUZ-LN50VG2	MUZ-LN60VG2
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	-	49 / 46	50 / 49	54 / 51	55 / 55
	Cooling	-	60	61	64	65
WEIGHT (kg)		-	35	35	40	53
DIMENSIONS (mm)	Width x Depth x Height	-	800 x 285 x 550	800 x 285 x 550	800 x 285 x 714	840 x 330 x 880
ELECTRICAL SUPPLY		-	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		-	Single	Single	Single	Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	-	0.580 / 0.485	0.800 / 0.820	1.480 / 1.380	1.810 / 1.790
	Heating/Cooling (UK)	-	0.523 / 0.406	0.722 / 0.686	1.335 / 1.151	1.632 / 1.494
STARTING CURRENT (A)		-	3.0	4.0	6.8	7.9
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	-	3.0 / 2.5 [7.1]	4.0 / 3.9 [9.9]	6.8 / 6.3 [13.9]	7.9 / 7.9 [15.2]
FUSE RATING (BS88) - HRC (A)		-	10	10	16	16
MAINS CABLE No. CORES		-	3	3	3	3
MAX PIPE LENGTH (m)		-	20	20	30	30
MAX HEIGHT DIFFERENCE (m)		-	12	12	12	15
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675) - 7m		-	1.0 / 0.68	1.0 / 0.68	1.25 / 0.85	1.45 / 0.98
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675)		-	0.26 / 0.18	0.26 / 0.18	0.26 / 0.18	0.46 / 0.32

* Derived from and subject to test results, for and on behalf of Mitsubishi Electric conducted at the Microbial Testing Laboratory, Textile Quality and Technology Center, Kobe, Japan.

Accessories

Indoor Units

MAC-286RH-E

Natural white remote controller holder

Outdoor Units

MAC-881SG

Air outlet guide for MUZ-LN25/35VG2

MAC-882SG

Air outlet guide for MUZ-LN50VG2

System Control Units

PAR-CT01MAA-SB/PB

Touch screen wired remote controller (PB = Premium Finish)

PAR-41MAA

Standard wired remote controller

MAC-334IF-E

Interface for M-NET, MA remote controller (PAR-41MAA / PAR-CT01MAA), on/off input and run/fault output

MAC-497IF-E

Interface for MA remote controller (PAR-41MAA / PAR-CT01MAA)

MELCOBEMS MINI (A1M+)


Modbus and BACnet MSTP CN105 adaptor

MELCORETAIL MINI


Retail control and input / output interface

Product Dimensions

MSZ-LN18/25/35/50/60VG2 R/B/V/W

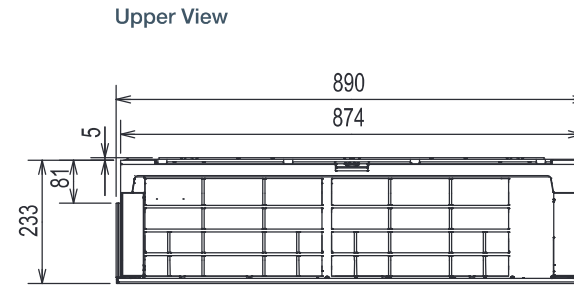

Front View

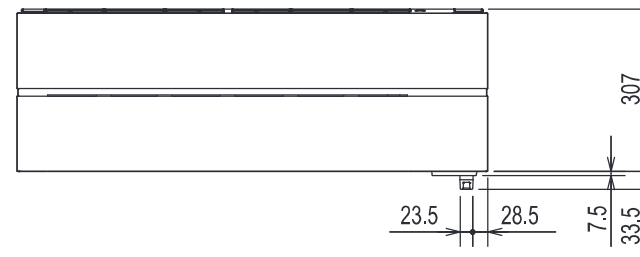

Side View

