

SEZ SERIES




This concealed ceiling-mounted indoor unit series is compact, and fits easily into rooms with lowered ceilings. Highly reliable energy-saving performance makes it a best match choice for concealed unit installations.

High Energy Efficiency




Highly efficient indoor units with DC inverter contribute to a reduction in electricity consumption throughout a year. The SEZ series has achieved energy-saving performance of "A+" or higher when connected to PUZ series and "A" or higher when connected to SUZ-M series.

Power Inverter

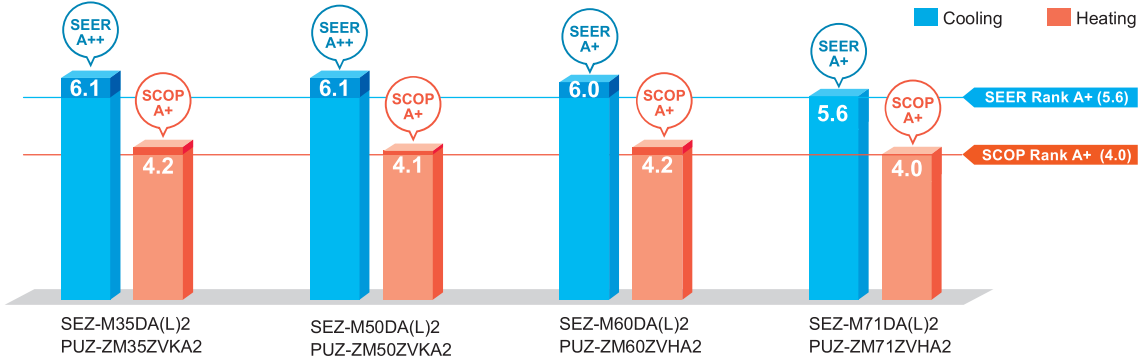


Standard Inverter (R32)

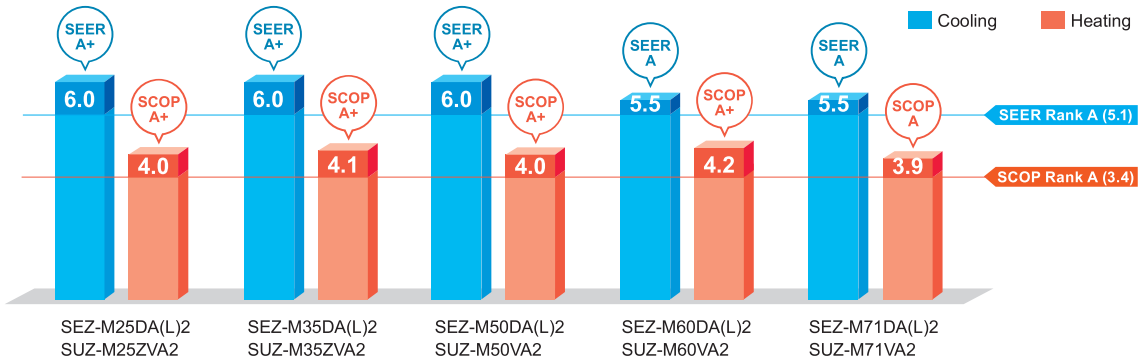


Lineup of compatible outdoor unit has been expanded by power inverter series

Although models in the SEZ series were previously only compatible with the standard inverter, they can now also be connected to small capacity power inverters. The ability to connect to a power inverter with high-performance specifications makes it possible to offer an even wider range of solutions to our customers.

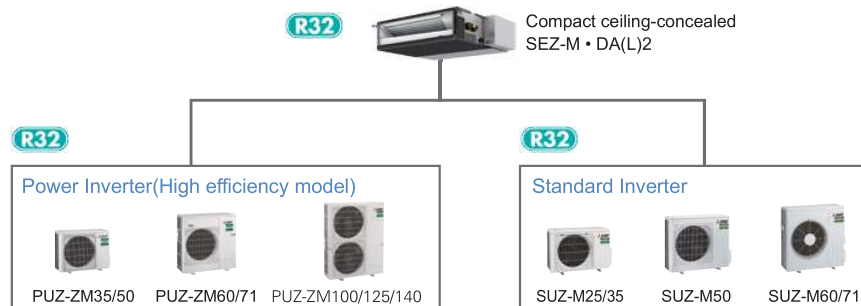

Compact Design with a Height of 200 mm

The height of the units is 200 mm for all capacity ranges. Its thin body is suitable for installation in low ceilings with a small cavity space.

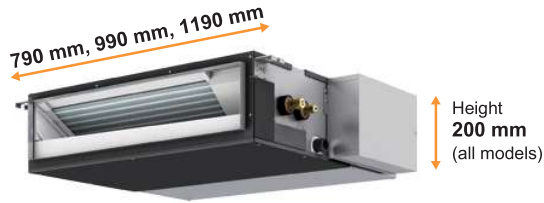

| SEZ-M DA(L)2 | | M25 | M35 | M50 | M60 | M71 |
|--------------|----|-----|-----|------|-----|-----|
| Height | mm | 200 | | | | |
| Width | mm | 790 | 990 | 1190 | | |

Low Noise Operation

Low noise operation contributes to a peaceful indoor environment. The SPL of M25/35 model, which is the quietest model among the new series, is as low as 22 dB (ESP 5 Pa, low fan speed setting).

| Sound pressure level | Capacity | | M25 | M35 | M50 | M60 | M71 |
|----------------------|-----------|------|-----|-----|-----|-----|-----|
| | Fan speed | | | | | | |
| | | High | 29 | 30 | 36 | 37 | 39 |
| | | Mid | 25 | 26 | 33 | 33 | 34 |
| | | Low | 22 | 22 | 29 | 29 | 29 |

*When fan speed setting is low, the cooling/heating capacity is subject to reduce.

*Operation noise may increase due to the installation environment or the operation status.

Selectable Static Pressure Levels


External static pressure can be selected from 5, 25, 35, and 50 Pa (set to 25 Pa at the time of factory shipment).

Four levels Available for All Models

Drain Pump (Optional)


The PAC-KE07DM-E drain pump is available as an option. The drain connection can be raised as high as 580 mm, allowing more freedom in piping layout design.

*The use of drain pump may increase the operation noise.

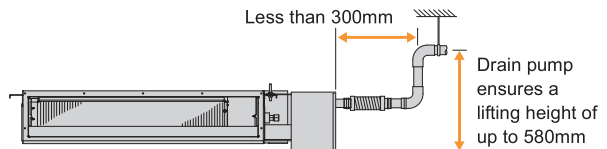

Connectable to Plasma Quad Connect

The optional Plasma Quad Connect MAC-100FT-E can be installed on the indoor unit's air inlet side. For installation, PQ attachment PAC-HA11PAR is required.

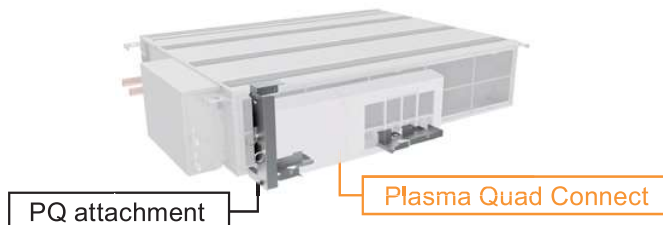

SEZ-M SERIES



Indoor Unit

R32
R410A



SEZ-M25/35/50/60/71DA2 (Requires Wired Remote Controller)
SEZ-M25/35/50/60/71DAL2 (Wireless Remote Controller is enclosed)

Outdoor Unit

For Single



Remote Controller



| Indoor Unit Combination | Outdoor Unit Capacity | | | | |
|-------------------------|-----------------------|------|------|------|------|
| | For Single | | | | |
| | 25 | 35 | 50 | 60 | 71 |
| S Series | 25x1 | 35x1 | 50x1 | 60x1 | 71x1 |
| Distribution Pipe | - | - | - | - | - |

| Type | | | Inverter Heat Pump | | | | | | |
|---|---|---------------------------------|--------------------|------------------------|------------------------|------------------------|------------------------|------------------------|--------------|
| Indoor Unit | | | SEZ-M25DA(L)I2 | SEZ-M35DA(L)I2 | SEZ-M50DA(L)I2 | SEZ-M60DA(L)I2 | SEZ-M71DA(L)I2 | | |
| Outdoor Unit | | | SUZ-M25VA | SUZ-M35VA | SUZ-M50VA | SUZ-M60VA | SUZ-M71VA | | |
| Refrigerant ⁽¹⁾ | | | R32 | | | | | | |
| Power Supply | Source | Outdoor power supply | | | | | | | |
| Cooling | Outdoor(V/Phase/Hz) | 230/Single/50 | | | | | | | |
| | Capacity | Rated | kW | 2.5 | 3.5 | 5.0 | 6.1 | 7.1 | |
| | | Min-Max | kW | 1.4 - 3.2 | 0.7 - 3.9 | 1.1 - 5.6 | 1.6 - 6.3 | 2.2 - 8.1 | |
| | Total Input | Rated | kW | 0.714 | 1.000 | 1.547 | 1.848 | 2.151 | |
| | EER ⁽⁴⁾ | | | 3.50 | 3.50 | 3.23 | 3.30 | 3.30 | |
| | Design load | | kW | 2.5 | 3.5 | 5.0 | 6.1 | 7.1 | |
| | Annual electricity consumption ⁽²⁾ | | kWh/a | 146 | 202 | 290 | 385 | 451 | |
| SEER ⁽⁴⁾⁽⁵⁾ | | | 6.0 | 6.0 | 6.0 | 5.5 | 5.5 | | |
| Heating | Energy efficiency class | | | A+ | A+ | A+ | A | A | |
| | Capacity | Rated | kW | 2.9 | 4.2 | 6.0 | 7.4 | 8.0 | |
| | | Min-Max | kW | 1.3 - 4.2 | 1.1 - 5.0 | 1.5 - 7.2 | 1.6 - 8.0 | 2.0 - 10.2 | |
| | Total Input | Rated | kW | 0.803 | 1.076 | 1.617 | 2.049 | 2.285 | |
| | COP ⁽⁴⁾ | | | 3.61 | 3.90 | 3.71 | 3.61 | 3.50 | |
| | Design load | | kW | 2.2 | 2.6 | 4.3 | 4.6 | 5.8 | |
| | Declared Capacity | at reference design temperature | kW | 2.0 (-10°C) | 2.3 (-10°C) | 3.8 (-10°C) | 4.1 (-10°C) | 5.2 (-10°C) | |
| | | at bivalent temperature | kW | 2.0 (-7°C) | 2.3 (-7°C) | 3.8 (-7°C) | 4.1 (-7°C) | 5.2 (-7°C) | |
| | | at operation limit temperature | kW | 2.0 (-10°C) | 2.3 (-10°C) | 3.8 (-10°C) | 4.1 (-10°C) | 5.2 (-10°C) | |
| | Back up heating capacity | | kW | 0.2 | 0.3 | 0.5 | 0.5 | 0.6 | |
| Annual electricity consumption ⁽²⁾ | | kWh/a | 769 | 878 | 1501 | 1516 | 2030 | | |
| SCOP ⁽⁴⁾⁽⁵⁾ | | | 4.0 | 4.1 | 4.0 | 4.2 | 3.9 | | |
| Energy efficiency class | | | A+ | A+ | A+ | A+ | A | | |
| Operating Current(Max) | Energy efficiency class | | | A+ | A+ | A+ | A+ | A | |
| | Input [cooling / Heating] | Rated | kW | 0.043 | 0.047 | 0.077 | 0.084 | 0.102 | |
| | Operating Current(Max) | | A | 0.62 | 0.65 | 0.82 | 0.88 | 1.00 | |
| | Dimensions | H*W*D | mm | 200 - 790 - 700 | 200 - 990 - 700 | 200 - 990 - 700 | 200 - 1190 - 700 | 200 - 1190 - 700 | |
| | Weight | | kg | 18 | 22 | 22 | 25.5 | 25.5 | |
| | Air Volume (Lo-Mid-Hi) | | m³/min | 5.5 - 7 - 9 | 7 - 9 - 11 | 10 - 12.5 - 15 | 12 - 15 - 18 | 12 - 16 - 20 | |
| | External Static Pressure ⁽⁶⁾ | | Pa | <5> - 25 - <35> - <50> | <5> - 25 - <35> - <50> | <5> - 25 - <35> - <50> | <5> - 25 - <35> - <50> | <5> - 25 - <35> - <50> | |
| | Sound Level (Lo-Mid-Hi) (SPL) | Rated | dB(A) | 23 - 26 - 30 | 23 - 27 - 31 | 30 - 34 - 37 | 30 - 34 - 38 | 30 - 35 - 40 | |
| | | 5Pa ⁽⁷⁾ | dB(A) | 22 - 25 - 29 | 22 - 26 - 30 | 29 - 33 - 36 | 29 - 33 - 37 | 29 - 34 - 39 | |
| | Sound Level (PWL) | | dB(A) | 50 | 51 | 57 | 58 | 60 | |
| | Outdoor Unit | Dimensions | H*W*D | mm | 550-800-285 | 550-800-285 | 714-800-285 | 880-840-330 | 880-840-330 |
| | | Weight | | kg | 30 | 35 | 41 | 54 | 55 |
| | | Air Volume | Cooling | m³/min | 36.3 | 34.3 | 45.8 | 50.1 | 50.1 |
| | | Heating | m³/min | 34.6 | 32.7 | 43.7 | 50.1 | 50.1 | |
| Sound Level (SPL) | | Cooling | dB(A) | 45 | 48 | 48 | 49 | 49 | |
| | | Heating | dB(A) | 46 | 48 | 49 | 51 | 51 | |
| Sound Level (PWL) | | Cooling | dB(A) | 59 | 59 | 64 | 65 | 66 | |
| Operating Current(Max) | | | A | 6.8 | 8.5 | 13.5 | 14.8 | 14.8 | |
| Breaker Size | | | A | 10 | 10 | 20 | 20 | 20 | |
| Ext. Piping | | Diameter ⁽⁸⁾ | Liquid/Gas | mm | 6.35 / 9.52 | 6.35 / 9.52 | 6.35 / 12.7 | 6.35 / 15.88 | 9.52 / 15.88 |
| | Max.Length | Out-In | m | 20 | 20 | 30 | 30 | 30 | |
| | Max.Height | Out-In | m | 12 | 12 | 30 | 30 | 30 | |
| Guaranteed Operating Range (Outdoor) | Cooling ⁽³⁾ | °C | -10 ~ +46 | -10 ~ +46 | -15 ~ +46 | -15 ~ +46 | -15 ~ +46 | | |
| | Heating | °C | -10 ~ +24 | -10 ~ +24 | -10 ~ +24 | -10 ~ +24 | -10 ~ +24 | | |

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 SEER/SCOP are measured at ESP 25Pa.

*4 SEER and SCOP are based on 2009/125/EC: Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

*6 The factory setting of ESP is shown without < >.

*7 SPL measured at ESP 5Pa.