


# MSZ-HR SERIES

Compact, high-performance indoor and outdoor units with R32 that is low global warming potential compared with the current refrigerant R410A contribute to room comfort and to prevent global warming.




## "Rank A+/"A+" Energy Savings Achieved for Entire Range of Series

All models in the series, from capacity 25 to 71, have achieved the "Rank A+" for SEER and "Rank A+" for SCOP as energy-savings rating, thanks to Mitsubishi Electric's inverter technologies which are adopted to provide automatic adjustment of operation load according to need.

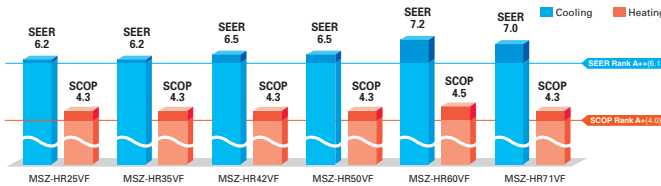

## Simple and Friendly Design


The round front surface provides a simple and friendly impression. And the width of indoor unit is compact, making installation in smaller, tighter spaces possible.

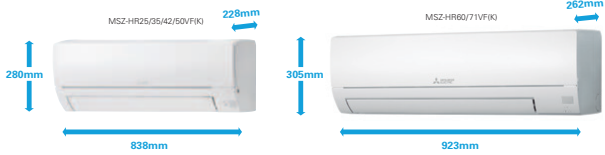

## Wi-Fi and System Control

### Wi-Fi Interface (Built-in)

Built-in interface enabling users to control air conditioners and check operating status via devices such as personal computers, tablets and smartphones.



### System Control Interface (Optional)


- Remote on/off operation is possible by input to the connector.
- Depending on the interface used, connecting a wired remote-control such as the PAR-41MAA is possible.
- Centralised control is possible when connected to M-NET.



\*Wi-Fi Interface and System Control Interface cannot be used simultaneously.

## Air Purifying Filter

This filter generates stable antibacterial and deodorising effects. The size of the three-dimensional surface has been increased as well, enlarging the filter capture area. These features give the Air Purifying Filter better dust collection performance than conventional filters. The superior air-cleaning effectiveness raises room comfort yet another level.



It is okay to wash the filter with water (air-cleaning effect is maintained)

3D surface (Waved surface)

## MSZ-HR SERIES




### Indoor Unit R32



### Outdoor Unit



### Remote Controller



Type	Inverter Head Pump								
	MSZ-HR25V/F(K)	MSZ-HR35V/F(K)	MSZ-HR42V/F(K)	MSZ-HR50V/F(K)	MSZ-HR60V/F(K)	MSZ-HR71V/F(K)			
Indoor Unit	MSZ-HR25V/F(K)	MSZ-HR35V/F(K)	MSZ-HR42V/F(K)	MSZ-HR50V/F(K)	MSZ-HR60V/F(K)	MSZ-HR71V/F(K)			
Outdoor Unit	MUZ-HR25VF	MUZ-HR35VF	MUZ-HR42VF	MUZ-HR50VF	MUZ-HR60VF	MUZ-HR71VF			
Sub-brand	R32								
Power Source	Outdoor Power Supply								
Supply	220V/50Hz/1-Phase								
Power Outdoor (V / Phase / Hz)	220V/50Hz/1-Phase								
Cooling	Design load	kW	2.5	3.4	4.2	5.5	6.1	7.1	
	Annual electricity consumption <sup>(1)</sup>	kWh/a	141	191	226	299	295	365	
	SEER <sup>(2)</sup>		6.2	6.2	6.5	6.5	7.2	7.0	
	Energy efficiency class		A**	A**	A**	A**	A**	A**	
	Capacity	kW	2.5	3.4	4.2	5.5	6.1	7.1	
	Min/Max	kW	0.5/0.9	0.8/1.4	1.1/1.6	1.5/2.0	1.7/2.4	2.0/2.9	
	Total input	kW	0.500	1.210	1.580	2.250	1.810	2.330	
	Design load	kW	1.9 (10°C)	2.4 (10°C)	2.9 (10°C)	3.8 (10°C)	4.6 (10°C)	5.4 (10°C)	
	Declared Capacity	kW	1.9 (10°C)	2.4 (10°C)	2.9 (10°C)	3.8 (10°C)	4.6 (10°C)	5.4 (10°C)	
	at outdoor air temperature	kW	1.9 (10°C)	2.4 (10°C)	2.9 (10°C)	3.8 (10°C)	4.6 (10°C)	5.4 (10°C)	
Heating	Design load	kW	1.9 (10°C)	2.4 (10°C)	2.9 (10°C)	3.8 (10°C)	4.6 (10°C)	5.4 (10°C)	
	Declared Capacity	kW	1.9 (10°C)	2.4 (10°C)	2.9 (10°C)	3.8 (10°C)	4.6 (10°C)	5.4 (10°C)	
	at outdoor air temperature	kW	1.9 (10°C)	2.4 (10°C)	2.9 (10°C)	3.8 (10°C)	4.6 (10°C)	5.4 (10°C)	
	Back-up heating capacity	kW	6.0 (10°C)	6.0 (10°C)	6.0 (10°C)	6.0 (10°C)	6.0 (10°C)	6.0 (10°C)	
	Annual electricity consumption <sup>(1)</sup>	kWh/a	614	781	908	1224	1430	1758	
	SCOP <sup>(2)</sup>		4.3	4.3	4.3	4.3	4.5	4.3	
	Energy efficiency class		A*	A*	A*	A*	A*	A*	
	Capacity	kW	3.15	3.8	4.7	6.4	6.8	8.1	
	Min/Max	kW	0.7 (3.5)	0.9 (3.7)	1.0 (3.4)	1.4 (3.5)	1.5 (3.5)	1.9 (3.0)	
	Total input	kW	0.850	0.975	1.300	1.850	1.810	2.440	
Operating Current (Max)	Input	kW	0.5	0.7	0.8	1.0	1.4	1.4	
	Operating Current (Max)	A	0.5	0.7	0.8	1.0	1.4	1.4	
	Dimensions	mm	260-838-228	260-838-228	260-838-228	260-838-228	305-923-262	305-923-262	
	Weight	kg	8.5	8.5	9	9	12.5	12.5	
	Indoor Unit	Air Volume	m <sup>3</sup> /min	3.6 (3.4) 7.2 (9.7)	3.6 (3.4) 9.1 (11.7)	3.0 (3.1) 10.8 (13.1)	3.4 (3.2) 11.2 (14.8)	10.4 (12.9) 18.4 (19.8)	10.4 (12.9) 18.4 (19.8)
		Sound Level (dB)	dB(A)	21-30-37-43	22-31-39-46	24-34-39-45	28-38-40-45	33-38-44-50	33-38-44-50
		Sound Level (FNU)	dB(A)	21-32-37-43	21-30-37-44	24-32-40-46	27-34-41-47	33-38-44-50	33-38-44-50
		Sound Level (FNU)	dB(A)	57	60	60	60	66	66
		Dimensions	mm	535-585-249	535-585-249	535-585-249	535-585-249	714-500-285	714-500-285
		Weight	kg	25	24	24	24	40	35
Air Volume		m <sup>3</sup> /min	30.3	32.2	30.4	30.4	42.8	42.8	
Sound Level (dB)		dB(A)	30.3	32.2	32.7	32.7	43.1	43.1	
Sound Level (FNU)		dB(A)	60	61	60	60	63	63	
Sound Level (FNU)		dB(A)	60	61	61	61	67	67	
Outdoor Unit	Sound Level (dB)	dB(A)	65	65	65	65	66	66	
	Sound Level (FNU)	dB(A)	4.8	6.4	8.2	9.8	13.6	13.6	
	Operating Current (Max)	A	10	10	10	10	16	16	
	Breaker Size	A	10	10	10	10	16	16	
	Ext. Piping	Max Length	m	20	20	20	20	30	
		Max Height	m	15	15	15	15	15	
		Guaranteed Operating Range (Outdoor)	°C	10 ~ +48	10 ~ +48	10 ~ +48	10 ~ +48	10 ~ +48	
		Range (Outdoor)	°C	10 ~ +24	10 ~ +24	10 ~ +24	10 ~ +24	10 ~ +24	
		Heating	°C	10 ~ +24	10 ~ +24	10 ~ +24	10 ~ +24	10 ~ +24	

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. This applies to a refrigerant leak with a total weight of 100g. The amount of 1 kg of the refrigerant that would be leaked to the atmosphere, the impact of global warming would be 300 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. New by to minimize such a refrigerant leak. The GWP of R32 is 675 in IPCC AR4 Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SEER, SCOP and other related descriptors are based on ISO 14543-1:2013 (A/C) and ISO 14543-2:2013 (H/C). The temperature conditions for calculating SCOP are based on "Average Season".

(4) Please see page 50-51 for heating equipment specifications.