

PLA SERIES



A complete line-up including deluxe units that offer added energy savings. The incorporation of wide air-outlet and the "3D i-see Sensor" enhances airflow distribution control, achieving an enhanced level of comfort throughout the room. The synergy of higher energy efficiency and more comfortable room environment results in the utmost user satisfaction.


Deluxe 4-way Cassette Line-up

For users seeking even further energy savings, Mitsubishi Electric now offers deluxe units (PLA-ZM) to complete the line-up of models in this series, from 35-140. Compared to the standard models (PLA-RP), deluxe models provide additional energy savings, contributing to a significant reduction in electricity costs.

Line-up

Series	Model	35	50	60	71	100	125	140
R32 R410A	Deluxe 4-way Cassette (PLA-ZM)	●	●	●	●	●	●	●
R410A	Standard 4-way Cassette (PLA-RP)	●	●	●	●	●	●	●


Indoor/Outdoor Unit Combinations

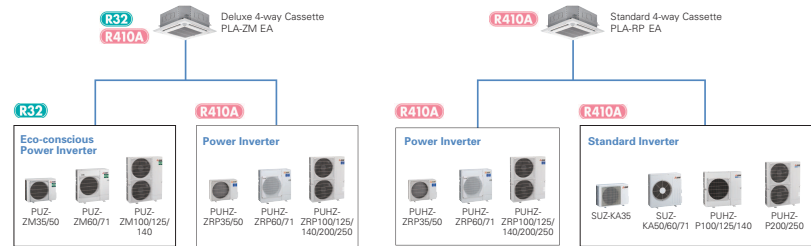

Industry-leading energy efficiency

Introduction of new R32 refrigerant realises improved cooling efficiency. Rating of more than 7.0 achieved for all capacity range.

Introduction of new R32 refrigerant reduces energy consumption and realises energy savings.


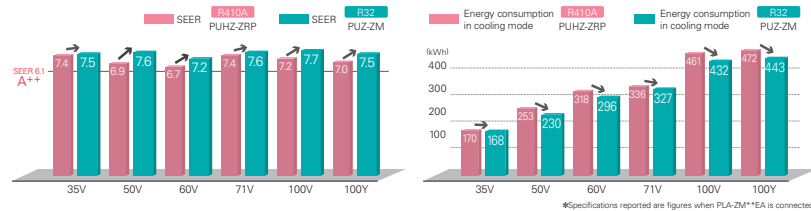


Horizontal Airflow

The new airflow control removes that uncomfortable drafty feeling with the introduction of a horizontal airflow that spreads across the ceiling. The ideal airflow for offices and restaurants.

[Horizontal airflow]

Model name: PLA-ZM140EA
Ceiling height: 3.2m
Mode: Cooling

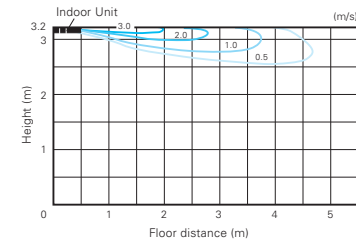

Automatic Grille Lowering Function (PLP-6EAJ)

An automatic grille lowering function is available for easy filter maintenance. Special wired and wireless remote controllers can be used to lower the intake grille for maintenance.



Easy Installation

Electrical box wiring

After reviewing the power supply terminal position in the electrical box, the structure was redesigned to improve connectivity. This has made previously complex wiring work easier.

■ Previous model (B Series)

■ New model (E Series)

Increased space for plumbing work

The top and bottom positions of the liquid and gas pipes have been revised to allow the gas pipe work, which requires more effort, to be completed first. Further, through structural innovations related to the space around the pipes, the area where the spanner can be moved has been increased, thus improving liquid pipe work and enabling it to be completed smoothly.

■ Previous model (B Series)

■ New model (E Series)

Temporary hanging hook

The structure of the panel has been revised and is now equipped with a temporary hanging hook. This has improved work efficiency during panel installation.

No need to remove screws

Installation is possible without removing the screws for the corner panel and the control box, simply loosen them. This lowers the risk of losing screws.

■ Corner panel

■ Control box cover


Lightweight decorative panel

After reviewing the structure and materials, weight has been reduced approximately 20% compared to the previous model, reducing the burden of installation.

3D i-see Sensor for S & P SERIES

Detects number of people


3D i-see Sensor detects the number of people in the room and sets the air-conditioning power accordingly. This makes automatic power-saving operation possible in places where the number of people entering and exiting is large. Additionally, when the area is continuously unoccupied, the system switches to a more enhanced power-saving mode. Depending on the setting, it will save additional capacity or stop operation altogether.



Detects number of people




Detects people's position



Detects people's position

Once the position of a person is detected, the duct angle of the vane is automatically adjusted in that direction. Each vane can be independently set to "block wind" or "not block wind" according to taste.

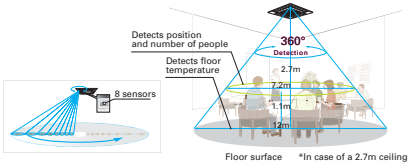

Detects number of people


Room occupancy energy-saving mode

The 3D i-see Sensor detects the number of people in the room. It then calculates the occupancy rate based on the maximum number of people in the room up to that point in time in order to save air-conditioning power. When the occupancy rate is approximately 30%, air-conditioning power equivalent to 1°C during both cooling and heating operation is saved. The temperature is controlled according to the number of people.




No occupancy energy-saving mode

When 3D i-see Sensor detects that no one is in the room, the system is switched to a pre-set power-saving mode. If the room remains unoccupied for more than 60min, air-conditioning power equivalent to 2°C during both cooling and heating operation is saved. This contributes to preventing waste in terms of heating and cooling.



No occupancy Auto-OFF mode*

When the room remains unoccupied for a pre-set period of time, the air conditioner turns off automatically, thereby providing even greater power savings. The time until operation is stopped can be set in intervals of 10min, ranging from 60 to 180 min.




*When MA Remote Controller is used to control multiple refrigerant systems, "No occupancy Auto-OFF mode" cannot be used.

Detects people's position

Direct/Indirect settings*

Some people do not like the feel of wind, some want to be warm from head to toe. People's likes and dislikes vary. With the 3D i-see Sensor, it is possible to choose to block or not block to the wind for each vane.



*PAR-33MAA or PAR-SL100A-E is required for each setting.


Seasonal airflow*

<When cooling>

Saves energy while keeping a comfortable effective temperature by automatically switching between ventilation and cooling. When a pre-set temperature is reached, the air conditioning unit switches to swing fan operation to maintain the effective temperature. This clever function contributes to keeping a comfortable coolness.

<When heating>

The air conditioning unit automatically switches between circulator and heating. Wasted heat that accumulates near the ceiling is reused via circulation. When a pre-set temperature is reached, the air conditioner switches from heating to circulator and blows air in the horizontal direction. It pushes down the warm air that has gathered near the ceiling to people's height, thereby providing smart heating.

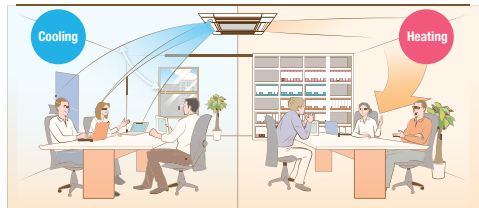

*PAR-33MAA is required for each setting.

SERIES SELECTION

Eco-conscious Power Inverter Series



Indoor Unit

R32
R410A



Panel PLA-ZM35/50/60/71/100/125/140EA

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Auto Elevation
PLP-6EA				
PLP-6EAL	✓			
PLP-6EAE		✓		
PLP-6EALAE	✓	✓		
PLP-6EALJ	✓			✓
PLP-6EALJE	✓	✓		✓
PLP-6EALM	✓		✓	
PLP-6EALME	✓	✓	✓	

Outdoor Unit

R32

For Single



PUZ-ZM35/50

PUZ-ZM60/71

PUZ-ZM100/125/140

R32

For Multi



PUZ-ZM71

PUZ-ZM100/125/140

Remote Controller



Optional



Optional



* Enclosed in PLP-6EALM/PLP-6EALME

PLA-ZM EA Indoor Unit Combinations

Indoor unit combinations shown below are possible.

Indoor Unit Combination	Outdoor Unit Capacity																			
	For Single								For Twin				For Triple		For Quadruple					
	35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUZ-ZM)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	-	-	35x2	50x2	60x2	71x2	-	-	50x3	-	-	-	-
Distribution Pipe	-	-	-	-	-	-	-	-	-	MSDD-50TR2-E				-	MSDT-111R2-E					

PLZ-ZM SERIES

ECO-CONCEPT Power Inverter



Type	Inverter Heat Pump												
Indoor Unit	PLA-ZM5EA			PLA-ZM5EA			PLA-ZM6EA			PLA-ZM7EA			
Outdoor Unit	PUZ-ZM59VKA			PUZ-ZM50VKA			PUZ-ZM60VKA			PUZ-ZM100VKA			
Cooling	Rated Capacity	kW			kW			kW			kW		
	Min-Max	kW			kW			kW			kW		
	EER												
Design Load	Annual Electricity Consumption**	kWh/a			kWh/a			kWh/a			kWh/a		
	EER												
	Energy Efficiency Class	A++			A++			A++			A++		
Heating (Average Season)	Rated Capacity	kW			kW			kW			kW		
	Min-Max	kW			kW			kW			kW		
	EER												
Design Load	Annual Electricity Consumption**	kWh/a			kWh/a			kWh/a			kWh/a		
	EER												
	Energy Efficiency Class	A++			A++			A++			A++		

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
 *2 The GWP of R32 is 675 in the IPCC 4th Assessment Report.
 *3 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
 *4 Optional air protection guide is required where ambient temperature is lower than -5°C.

SERIES SELECTION

Power Inverter Series

Indoor Unit

R32
R410A



Outdoor Unit

R410A

For Single



Panel PLA-ZM35/50/60/71/100/125/140EA

Panel	With Signal Receiver	With 3D-see Sensor	With Wireless Remote Controller	With Auto Elevation
PLP-6EA				
PLP-6EAL	✓			
PLP-6EAJ		✓		
PLP-6EALJ	✓	✓		
PLP-6EALM	✓		✓	
PLP-6EALME	✓	✓	✓	

For Multi



Remote Controller



Standard Inverter Series

Indoor Unit

R410A



Outdoor Unit

R410A

For Single



Panel PLA-RP35/50/60/71/100/125/140EA

Panel	With Signal Receiver	With 3D-see Sensor	With Wireless Remote Controller	With Auto Elevation
PLP-6EA				
PLP-6EAL	✓			
PLP-6EAJ		✓		
PLP-6EALJ	✓	✓		
PLP-6EALM	✓		✓	
PLP-6EALME	✓	✓	✓	

For Multi



Remote Controller



PLA-ZM/RP EA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination	Outdoor Unit Capacity																			
	For Single				For Twin				For Triple				For Quaduple							
	35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	-	-	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
Distribution Pipe	-	-	-	-	-	-	-	-	-	MSDD-50TR-E	MSDD-50WR-E	MSDT-111R-E	MSDF-111R-E	-	-	-	-	-	-	-
Standard Inverter (SUZ & PUHZ-F)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	-	-	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4	
Distribution Pipe	-	-	-	-	-	-	-	-	-	MSDD-50TR-E	MSDD-50WR-E	MSDT-111R-E	MSDF-111R-E	-	-	-	-	-	-	-

