

# PLA SERIES

PLA-ZM35/50/60/71/100/125/140EA

PLA-M35/50/60/71/100/125/140EA


A complete line-up including deluxe units that offer added energy savings. The incorporation of wide air-outlet and the "3D i-see Sensor" enhances airflow distribution control, achieving an enhanced level of comfort throughout the room. The synergy of higher energy efficiency and more comfortable room environment results in the utmost user satisfaction.



## Deluxe 4-way Cassette Line-up


For users seeking even further energy savings, Mitsubishi Electric now offers deluxe units (PLA-ZM) to complete the line-up of models in this series, from 35-140. Compared to the standard models (PLA-RP), deluxe models provide additional energy savings, contributing to a significant reduction in electricity costs.

### Indoor/Outdoor Unit Combinations

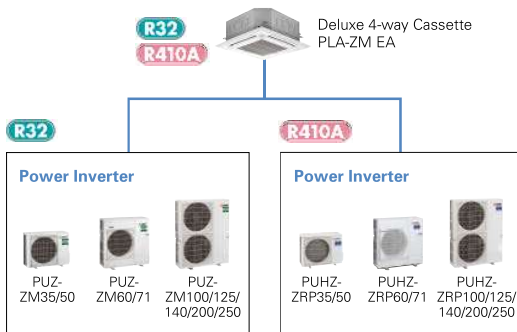


### Line-up

Series	Model	35	50	60	71	100	125	140
R32 R410A	Deluxe 4-way Cassette (PLA-ZM)	●	●	●	●	●	●	●
R32 R410A	Standard 4-way Cassette (PLA-M)	●	●	●	●	●	●	●

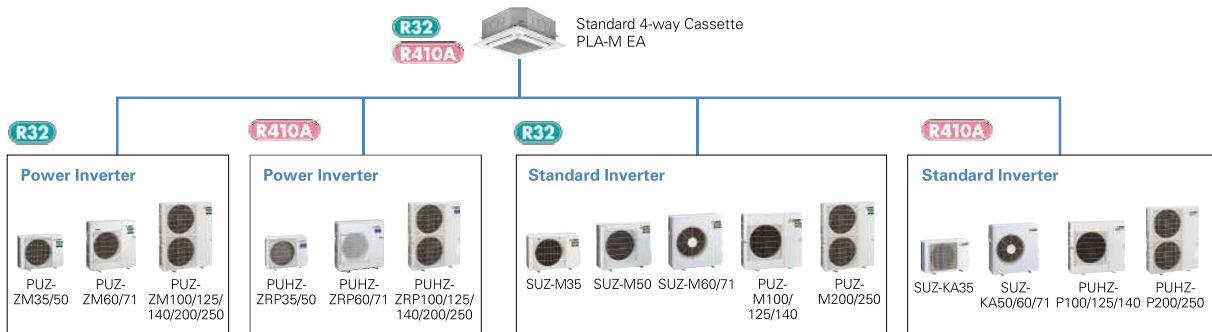


## Industry-leading energy efficiency

Introduction of new R32 refrigerant realises improved cooling efficiency. Rating of more than 7.0 achieved for all capacity range.

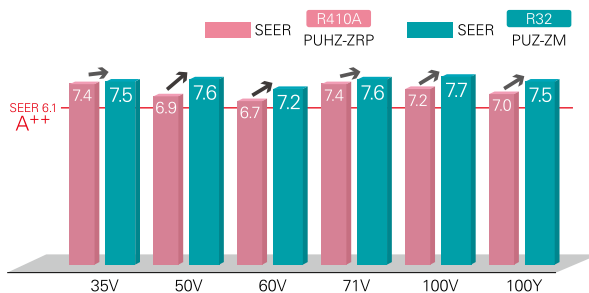

Introduction of new R32 refrigerant reduces energy consumption and realises energy savings.

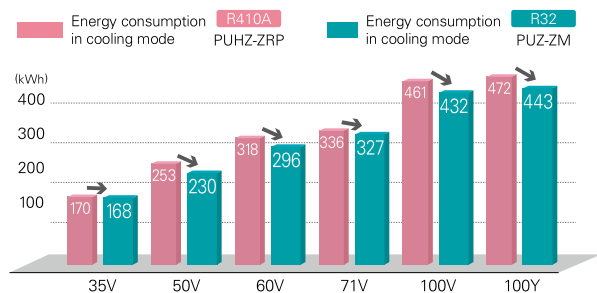


\*Specifications reported are figures when PLA-ZM\*\*EA is connected.

## Horizontal Airflow

The new airflow control removes that uncomfortable drafty feeling with the introduction of a horizontal airflow that spreads across the ceiling. The ideal airflow for offices and restaurants.

[Horizontal airflow]  
Model name: PLA-ZM140EA  
Ceiling height: 3.2m  
Mode: Cooling

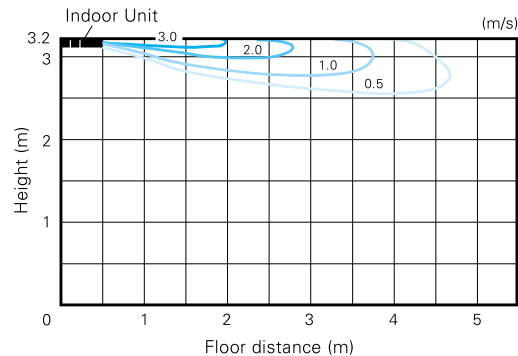

## Automatic Grille Lowering Function (PLP-6EAJ)

An automatic grille lowering function is available for easy filter maintenance. Special wired and wireless remote controllers can be used to lower the intake grille for maintenance.



Grille Elevation Remote Controller  
(comes with the automatic elevation panel)



Wired Remote Controller



Wireless Remote Controller



## Easy Installation

### Electrical box wiring

After reviewing the power supply terminal position in the electrical box, the structure was redesigned to improve connectivity. This has made previously complex wiring work easier.

■ Previous model (B Series)




■ New model (E Series)



### Increased space for plumbing work

The top and bottom positions of the liquid and gas pipes have been reversed to allow the gas pipe work, which requires more effort, to be completed first. Further, through structural innovations related to the space around the pipes, the area where the spanner can be moved has been increased, thus improving liquid pipe work and enabling it to be completed smoothly.

■ Previous model (B Series)



■ New model (E Series)



### Temporary hanging hook

The structure of the panel has been revised and is now equipped with a temporary hanging hook. This has improved work efficiency during panel installation.



### No need to remove screws

Installation is possible without removing the screws for the corner panel and the control box, simply loosen them. This lowers the risk of losing screws.

■ Corner panel



■ Control box cover



### Lightweight decorative panel

After reviewing the structure and materials, weight has been reduced approximately 20% compared to the previous model, reducing the burden of installation.





## 3D i-see Sensor for S & P SERIES

### Detects number of people

3D i-see Sensor detects the number of people in the room and sets the air-conditioning power accordingly. This makes automatic power-saving operation possible in places where the number of people entering and exiting is large. Additionally, when the area is continuously unoccupied, the system switches to a more enhanced power-saving mode. Depending on the setting, it will save additional capacity or stop operation altogether.

### Detects people's position

Once the position of a person is detected, the duct angle of the vane is automatically adjusted in that direction. Each vane can be independently set to "block wind" or "not block wind" according to taste.

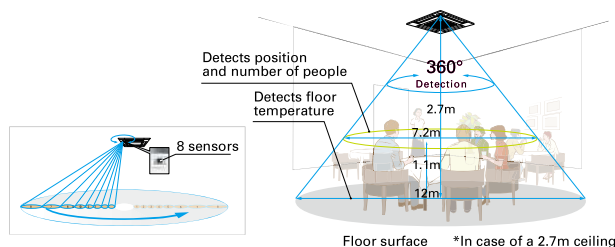

### Detects number of people

#### Room occupancy energy-saving mode

The 3D i-see Sensor detects the number of people in the room. It then calculates the occupancy rate based on the maximum number of people in the room up to that point in time in order to save air-conditioning power. When the occupancy rate is approximately 30%, air-conditioning power equivalent to 1°C during both cooling and heating operation is saved. The temperature is controlled according to the number of people.


#### No occupancy energy-saving mode

When 3D i-see Sensor detects that no one is in the room, the system is switched to a pre-set power-saving mode. If the room remains unoccupied for more than 60min, air-conditioning power equivalent to 2°C during both cooling and heating operation is saved. This contributes to preventing waste in terms of heating and cooling.

#### No occupancy Auto-OFF mode\*

When the room remains unoccupied for a pre-set period of time, the air conditioner turns off automatically, thereby providing even greater power savings. The time until operation is stopped can be set in intervals of 10min, ranging from 60 to 180 min.

\*When MA Remote Controller is used to control multiple refrigerant systems, "No occupancy Auto-OFF mode" cannot be used.

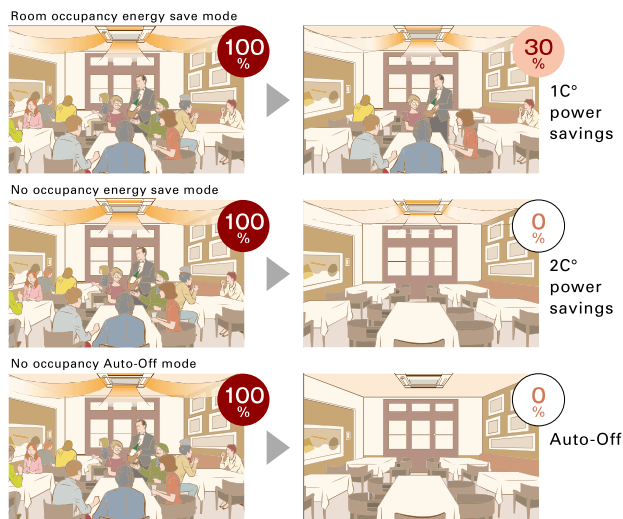


\*PAR-40MAA is required for each setting

### Detects people's position

#### Direct/Indirect settings\*

Some people do not like the feel of wind, some want to be warm from head to toe. People's likes and dislikes vary. With the 3D i-see Sensor, it is possible to choose to block or not block to the wind for each vane.

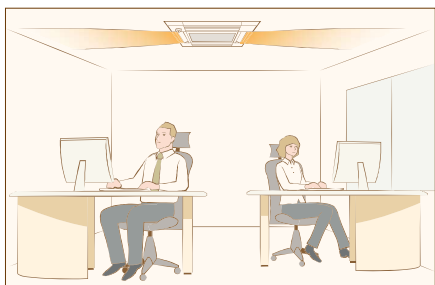

\*PAR-40MAA or PAR-SL100A-E is required for each setting.


#### Seasonal airflow\*

##### <When cooling>

Saves energy while keeping a comfortable effective temperature by automatically switching between ventilation and cooling. When a pre-set temperature is reached, the air conditioning unit switches to swing fan operation to maintain the effective temperature. This clever function contributes to keeping a comfortable coolness.

##### <When heating>

The air conditioning unit automatically switches between circulator and heating. Wasted heat that accumulates near the ceiling is reused via circulation. When a pre-set temperature is reached the air conditioner switches from heating to circulator and blows air in the horizontal direction. It pushes down the warm air that has gathered near the ceiling to people's height, thereby providing smart heating.

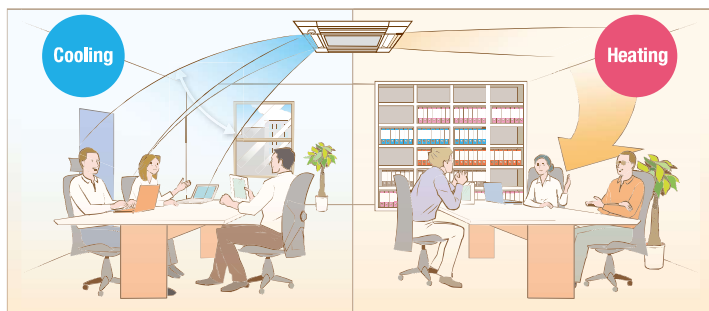

\*PAR-40MAA is required for each setting.

## SERIES SELECTION

### Power Inverter Series

#### Indoor Unit

**R32**  
**R410A**



**Panel** PLA-ZM35/50/60/71/100/125/140EA

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Auto Elevation
PLP-6EA				
PLP-6EAL	✓			
PLP-6EAE		✓		
PLP-6EAE	✓	✓		
PLP-6EAJ	✓			✓
PLP-6EAJE	✓	✓		✓
PLP-6EALM	✓		✓	
PLP-6EALME	✓	✓	✓	

#### Outdoor Unit

**R32**

For Single



PUZ-ZM35/50



PUZ-ZM60/71



PUZ-ZM100/125/140

**R32**

For Multi  
(Twin/Triple/Quadruple)



PUZ-ZM71



PUZ-ZM100/125/140/200/250

#### Remote Controller



Optional



Optional



Optional



\*

\* Enclosed in PLP-6EALM/PLP-6EALME

### PLA-ZM EA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E			MSDD-50WR2-E			MSDT-111R3-E			MSDF-111R2-E	

## SERIES SELECTION

### Standard Inverter Series

#### Indoor Unit

**R32**  
**R410A**



**Panel** PLA-M35/50/60/71/100/125/140EA

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Auto Elevation
PLP-6EA				
PLP-6EAL	✓			
PLP-6EAE		✓		
PLP-6EAE	✓	✓		
PLP-6EAJ	✓			✓
PLP-6EAJE	✓	✓		✓
PLP-6EALM	✓		✓	
PLP-6EALME	✓	✓	✓	

#### Outdoor Unit

**R32**

For Single



SUZ-M35



SUZ-M50



SUZ-M60/71



PUZ-M100/125/140

**R32**

For Multi  
(Twin/Triple/Quadruple)



PUZ-M100/125/140



PUZ-M200/250

#### Remote Controller



Optional



Optional



Optional



\*

\* Enclosed in PLP-6EALM/PLP-6EALME

### PLA-M EA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (SUZ & PUHZ-P)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	—	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
Distribution Pipe		—	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E			MSDD-50WR2-E		MSDT-111R3-E			MSDF-111R2-E	



# PLA-ZM SERIES

## POWER INVERTER



Type	Inverter Heat Pump													
Indoor Unit			PLA-ZM35EA	PLA-ZM50EA	PLA-ZM60EA	PLA-ZM71EA	PLA-ZM100EA		PLA-ZM125EA		PLA-ZM140EA			
Outdoor Unit			PUZ-ZM35VKA	PUZ-ZM50VKA	PUZ-ZM60VHA	PUZ-ZM71VHA	PUZ-ZM100VKA	PUZ-ZM100YKA	PUZ-ZM125VKA	PUZ-ZM125YKA	PUZ-ZM140VKA	PUZ-ZM140YKA		
Refrigerant			R32**1											
Power Supply	Source	Outdoor power supply												
	Outdoor (V/Phase/Hz)	VKA • VHA:230 / Single / 50, YKA:400 / Three / 50												
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4	
		Min - Max	kW	1.6 ~ 4.5	2.3 ~ 5.6	2.7 ~ 6.5	3.3 ~ 8.1	4.9 ~ 11.4	4.9 ~ 11.4	5.5 ~ 14.0	5.5 ~ 14.0	6.2 ~ 15.0	6.2 ~ 15.0	
	Total Input	Rated	kW	0.705	1.106	1.452	1.651	2.065	2.065	3.378	3.378	3.722	3.722	
	EER			5.10	4.52	4.20	4.30	4.60	4.60	3.70	3.70	3.60	3.60	
		EEL Rank		—	—	—	—	—	—	—	—	—	—	
	Design Load		kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4	
	Annual Electricity Consumption*2		kWh/a	168	230	296	327	432	443	—	—	—	—	
	SEER			7.5	7.6	7.2	7.6	7.7	7.5	—	—	—	—	
		Energy Efficiency Class		A++	A++	A++	A++	A++	A++	—	—	—	—	
	Heating (Average Season)	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0
		Min - Max	kW	1.6 ~ 5.2	2.5 ~ 7.3	2.8 ~ 8.2	3.5 ~ 10.2	4.5 ~ 14.0	4.5 ~ 14.0	5.0 ~ 16.0	5.0 ~ 16.0	5.7 ~ 18.0	5.7 ~ 18.0	
Total Input		Rated	kW	0.820	1.363	1.707	1.818	2.604	2.604	3.674	3.674	4.312	4.312	
COP				5.00	4.40	4.10	4.40	4.30	4.30	3.81	3.81	3.71	3.71	
		EEL Rank		—	—	—	—	—	—	—	—	—	—	
Design Load			kW	2.5	3.8	4.4	4.7	7.8	7.8	—	—	—	—	
Declared Capacity		at reference design temperature	kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	
		at bivalent temperature	kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	
		at operation limit temperature	kW	2.1 (-11°C)	3.7 (-11°C)	2.8 (-11°C)	3.5 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—	—	—	
Back Up Heating Capacity			kW	0	0	0	0	0	0	—	—	—	—	
Annual Electricity Consumption*2		kWh/a	745	1083	1339	1370	2277	2277	—	—	—	—		
	SCOP			4.7	4.9	4.6	4.8	4.8	4.8	—	—	—	—	
		Energy Efficiency Class		A++	A++	A++	A++	A++	A++	—	—	—	—	
Operating Current (max)	Indoor Unit	Input	Rated	A	13.2	13.2	19.2	19.3	27.0	8.5	27.0	10.0	28.7	13.7
		Operating Current (max)	A	0.03	0.03	0.03	0.05	0.07	0.07	0.08	0.08	0.10	0.10	
		Operating Current (max)	A	0.21	0.22	0.22	0.34	0.47	0.47	0.52	0.52	0.66	0.66	
		Dimensions <Panel>	H × W × D	mm	258 - 840	840 <40 - 950 - 950>	—	—	298 - 840	840 <40 - 950 - 950>	—	—	—	—
		Weight <Panel>	kg	21 <5>	—	—	—	—	26 <5>	26 <5>	26 <5>	26 <5>	26 <5>	26 <5>
		Air Volume [Lo-Mi2-Mi1-Hi]	m³/min	11-13-15-16	12-14-16-18	12-14-16-18	17-19-21-23	19-22-25-28	19-22-25-28	21-24-26-29	21-24-26-29	24-26-29-32	24-26-29-32	
		Sound Level (SPL) [Lo-Mi2-Mi1-Hi]	dB(A)	26-28-29-31	27-29-31-32	27-29-31-32	28-30-33-36	31-34-37-40	31-34-37-40	33-36-39-41	33-36-39-41	36-39-42-44	36-39-42-44	
		Sound Level (PWL)	dB(A)	51	54	54	56	61	61	62	62	65	65	
	Outdoor Unit	Dimensions	H × W × D	mm	630 - 809 - 300	943 - 950 - 330 (+25)	—	—	1,338 - 1,050 - 330 (+40)	—	—	—	—	—
		Weight		kg	46	46	70	70	116	123	116	125	118	131
Air Volume		Cooling	m³/min	45	45	55	55	110	110	120	120	120	120	
		Heating	m³/min	45	45	55	55	110	110	120	120	120	120	
Sound Level (SPL)		Cooling	dB(A)	44	44	47	47	49	49	50	50	50	50	
		Heating	dB(A)	46	46	49	49	51	51	52	52	52	52	
Sound Level (PWL)		Cooling	dB(A)	65	65	67	67	69	69	70	70	70	70	
		Heating	dB(A)	65	65	67	67	69	69	70	70	70	70	
Operating Current (max)			A	13.0	13.0	19.0	19.0	26.5	26.5	9.5	28.0	13.0	13.0	
Breaker Size			A	16	16	25	25	32	32	16	16	16	16	
Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
	Max. Length	Out-In	m	50	50	55	55	100	100	100	100	100	100	
	Max. Height	Out-In	m	30	30	30	30	30	30	30	30	30	30	
	Guaranteed Operating Range [Outdoor]	Cooling**3	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
	Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21		

\*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

\*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

\*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

# PLA-M SERIES

## STANDARD INVERTER



Type			Inverter Heat Pump										
Indoor Unit			PLA-M35EA	PLA-M50EA	PLA-M60EA	PLA-M71EA	PLA-M100EA		PLA-M125EA		PLA-M140EA		
Outdoor Unit			SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA	PUZ-M100VKA	PUZ-M100YKA	PUZ-M125VKA	PUZ-M125YKA	PUZ-M140VKA	PUZ-M140YKA	
Refrigerant			R32**1										
Power Supply	Source	Outdoor power supply											
	Outdoor (V/Phase/Hz)	VA • VKA:230 / Single / 50, YKA:400 / Three / 50											
Cooling	Capacity	Rated	kW	3.6	5.5	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4
		Min - Max	kW	0.8 ~ 3.9	1.2 ~ 5.6	1.6 ~ 6.3	2.2 ~ 8.1	4.0 ~ 10.6	4.0 ~ 10.6	5.8 ~ 13.0	5.8 ~ 13.0	5.8 ~ 14.1	5.8 ~ 14.1
	Total Input	Rated	kW	0.90	1.61	1.84	1.91	2.71	2.71	4.01	4.01	4.96	4.96
	EER			4.00	3.40	3.30	3.70	3.50	3.50	3.01	3.01	2.70	2.70
		EEL Rank		—	—	—	—	—	—	—	—	—	—
	Design Load		kW	3.6	5.5	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4
	Annual Electricity Consumption*2		kWh/a	170	285	320	331	474	474	—	—	—	—
	SEER			7.4	6.7	6.6	7.5	7.0	7.0	—	—	—	—
		Energy Efficiency Class		A++	A++	A++	A++	A++	A++	A++	A++	A++	A++
	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	13.5	13.5	15.0	15.0
Heating (Average Season)		Min - Max	kW	1.0 ~ 5.0	1.5 ~ 7.2	1.6 ~ 8.0	2.0 ~ 10.2	2.8 ~ 12.5	2.8 ~ 12.5	4.1 ~ 15.0	4.1 ~ 15.0	4.2 ~ 15.8	4.2 ~ 15.8
	Total Input	Rated	kW	0.97	1.73	1.84	2.21	3.01	3.01	3.63	3.63	4.39	4.39
	COP			4.20	3.46	3.80	3.61	3.71	3.71	3.71	3.71	3.41	3.41
		EEL Rank		—	—	—	—	—	—	—	—	—	—
	Design Load		kW	2.6	4.3	4.6	5.8	8.0	8.0	8.5	8.5	9.4	9.4
	Declared Capacity	at reference design temperature	kW	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	8.5 (-10°C)	8.5 (-10°C)	9.4 (-10°C)	9.4 (-10°C)
		at bivalent temperature	kW	2.3 (-7°C)	3.8 (-7°C)	4.1 (-7°C)	5.2 (-7°C)	7.0 (-7°C)	7.0 (-7°C)	8.5 (-10°C)	8.5 (-10°C)	9.4 (-10°C)	9.4 (-10°C)
		at operation limit temperature	kW	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	4.5 (-15°C)	4.5 (-15°C)	6.0 (-15°C)	6.0 (-15°C)	7.0 (-15°C)	7.0 (-15°C)
	Back Up Heating Capacity		kW	0.3	0.5	0.5	0.6	2.0	2.0	—	—	—	—
	Annual Electricity Consumption*2		kWh/a	774	1456	1458	1796	2428	2428	—	—	—	—
SCOP			4.7	4.1	4.4	4.5	4.6	4.6	—	—	—	—	
	Energy Efficiency Class		A++	A+	A+	A+	A++	A++	A++	A++	A++	A++	
Operating Current (max)		A	8.7	13.7	15.0	15.1	20.5	12.0	27.2	12.2	30.7	12.2	
	Input	Rated	kW	0.03	0.03	0.03	0.04	0.07	0.07	0.10	0.10	0.10	
Indoor Unit	Operating Current (max)	A	0.20	0.22	0.24	0.27	0.46	0.46	0.66	0.66	0.66	0.66	
	Dimensions <Panel>	H × W × D	mm	258 - 840 - 840 <40 - 950 - 950>				298 - 840 - 840 <40 - 950 - 950>				26 <5>	
Outdoor Unit	Weight <Panel>	kg	19 <5>		19 <5>	21 <5>	21 <5>	24 <5>	24 <5>	26 <5>	26 <5>	26 <5>	
	Air Volume [Lo-Mi2-Mi1-Hi]	m³/min	11-13-15-16		12-14-16-18	12-14-16-18	14-17-19-21	19-23-26-29	19-23-26-29	21-25-28-31	21-25-28-31	24-26-29-32	
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]	dB(A)	26-28-29-31		27-29-31-32	27-29-31-32	28-30-32-34	31-34-37-40	31-34-37-40	33-37-41-44	33-37-41-44	36-39-42-44	
	Sound Level (PWL)	dB(A)	51		54	54	56	61	61	65	65	65	
	Dimensions	H × W × D	mm	550-800-285		714-800-285	880-840-330	—		981-1050-330 (+40)		84	
	Weight	kg	35		41	54	55	76	78	84	85	85	
	Air Volume	Cooling	m³/min	34.3		45.8	50.1	50.1	79.0	79.0	86.0	86.0	
		Heating	m³/min	32.7		43.7	50.1	50.1	79.0	79.0	92.0	92.0	
	Sound Level (SPL)	Cooling	dB(A)	48		48	49	49	51	51	54	55	
		Heating	dB(A)	48		49	51	51	54	54	56	57	
Ext. Piping	Sound Level (PWL)	Cooling	dB(A)	59		64	65	66	70	72	72	73	
	Operating Current (max)	A	8.5		13.5	14.8	14.8	20.0	11.5	26.5	11.5	30.0	
	Breaker Size	A	10		20	20	20	32	16	32	16	40	
	Diameter	Liquid / Gas	mm	6.35 / 9.52		6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
	Max. Length	Out-In	m	30		30	30	30	55	55	65	65	
		Out-In	m	30		30	30	30	55	55	65	65	
	Max. Height	Out-In	m	12		30	30	30	30	30	30	30	
	Guaranteed Operating Range [Outdoor]	Cooling*3	°C	-10 ~ +46		-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-10 ~ +24		-10 ~ +24	-10 ~ +24	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21