

SEZ SERIES




This concealed ceiling-mounted indoor unit series is compact, and fits easily into rooms with lowered ceilings. Highly reliable energy-saving performance makes it a best match choice for concealed unit installations.

High Energy Efficiency




Highly efficient indoor units with DC inverter contribute to a reduction in electricity consumption throughout a year. The SEZ series has achieved energy-saving performance of "A+" or higher when connected to PUZ series and "A" or higher when connected to SUZ-M series.

Power Inverter

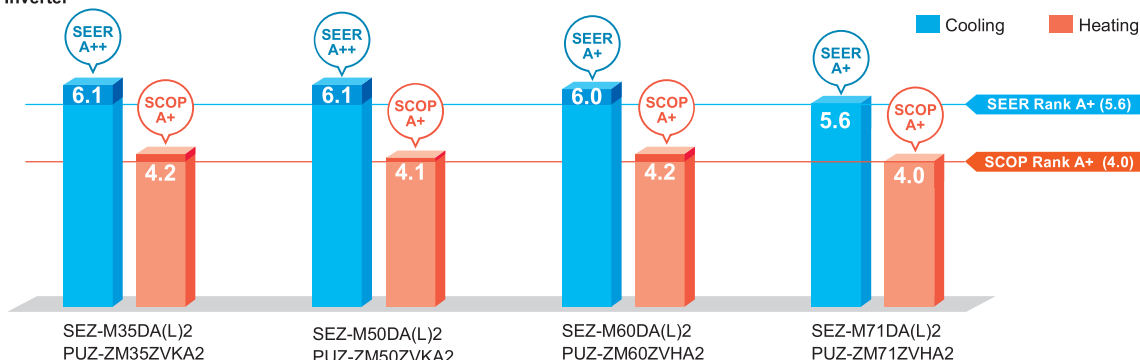


Standard Inverter (R32)

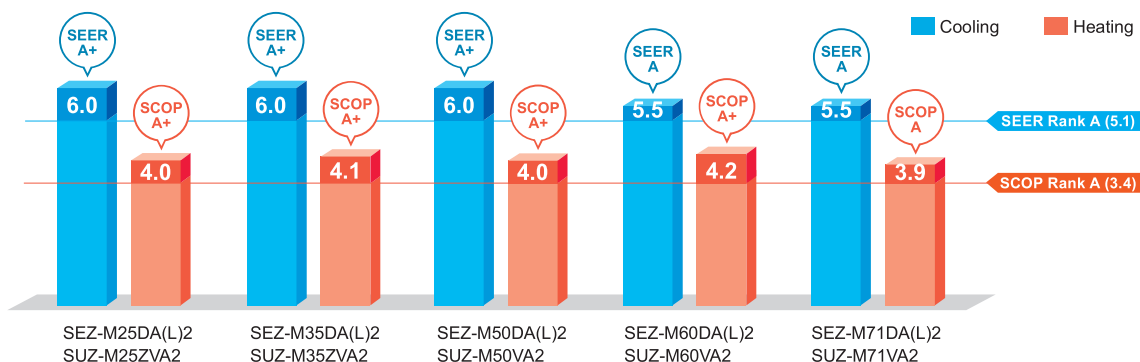


Lineup of compatible outdoor unit has been expanded by power inverter series

Although models in the SEZ series were previously only compatible with the standard inverter, they can now also be connected to small capacity power inverters. The ability to connect to a power inverter with high-performance specifications makes it possible to offer an even wider range of solutions to our customers.

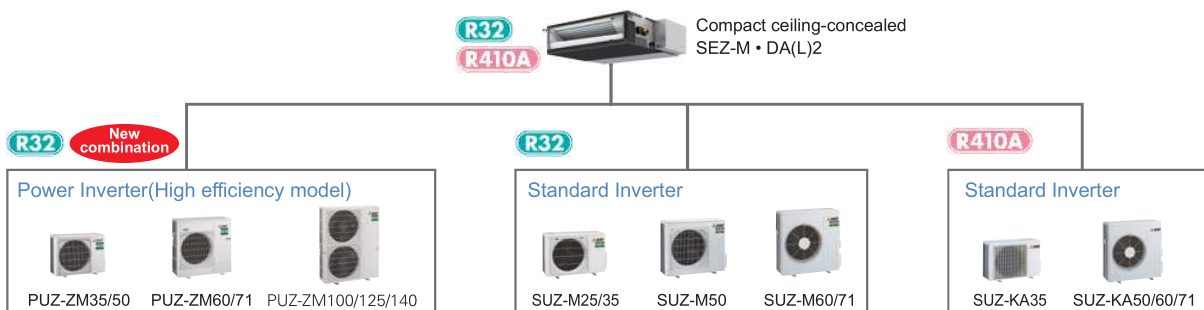

Compact Design with a Height of 200 mm

The height of the units is 200 mm for all capacity ranges. Its thin body is suitable for installation in low ceilings with a small cavity space.

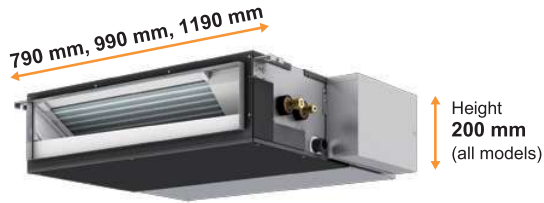

SEZ-M DA(L)2		M25	M35	M50	M60	M71
Height	mm	200				
Width	mm	790	990	1190		

Low Noise Operation

Low noise operation contributes to a peaceful indoor environment. The SPL of M25/35 model, which is the quietest model among the new series, is as low as 22 dB (ESP 5 Pa, low fan speed setting).

		Capacity	M25	M35	M50	M60	M71
Sound pressure level	Fan speed	High	29	30	36	37	39
		Mid	25	26	33	33	34
		Low	22	22	29	29	29

*When fan speed setting is low, the cooling/heating capacity is subject to reduce.

*Operation noise may increase due to the installation environment or the operation status.

Selectable Static Pressure Levels


External static pressure can be selected from 5, 25, 35, and 50 Pa (set to 25 Pa at the time of factory shipment).

Four levels Available for All Models

Drain Pump (Optional)


The PAC-KE07DM-E drain pump is available as an option. The drain connection can be raised as high as 580 mm, allowing more freedom in piping layout design.

*The use of drain pump may increase the operation noise.

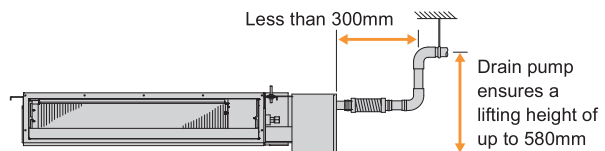

Connectable to Plasma Quad Connect

The optional Plasma Quad Connect MAC-100FT-E can be installed on the indoor unit's air inlet side. For installation, PQ attachment PAC-HA11PAR is required.

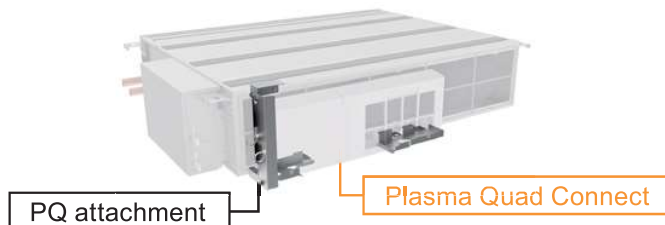

SEZ-M SERIES



Indoor Unit

R32
R410A



SEZ-M25/35/50/60/71DA2 (Requires Wired Remote Controller)
SEZ-M25/35/50/60/71DAL2 (Wireless Remote Controller is enclosed)

Outdoor Unit

For Single

R32



SUZ-M25/35VA

R32



SUZ-M50VA

R32



SUZ-M60/71VA

Remote Controller



Enclosed in
SEZ-M DAL2



*optional
(for SEZ-M DA2)



*optional
(for SEZ-M DA2)



*optional
(for SEZ-M DA2)



Indoor Unit Combination		Outdoor Unit Capacity				
		For Single				
S Series		25	35	50	60	71
	Distribution Pipe	25x1	35x1	50x1	60x1	71x1

Type	Inverter Heat Pump					
Indoor Unit	SEZ-M25DA(L)2		SEZ-M35DA(L)2	SEZ-M50DA(L)2	SEZ-M60DA(L)2	SEZ-M71DA(L)2
Outdoor Unit	SUZ-M25VA		SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA
Refrigerant ^(*)	R32					
Power Supply	Outdoor power supply					
Cooling	Source	230/Single/50				
Cooling	Outdoor(V/Phase/Hz)					
	Capacity	Rated	kW	2.5	3.5	5.0
	Min-Max		kW	1.4 - 3.2	0.7 - 3.9	1.1 - 5.6
	Total Input	Rated	kW	0.714	1.000	1.547
	EER ^(*)			3.50	3.23	3.30
	Design load		kW	2.5	3.5	5.0
	Annual electricity consumption ^(*)		kWh/a	146	202	290
	SEER ^(*)			6.0	6.0	6.0
	Energy efficiency class			A+	A+	A+
	Capacity	Rated	kW	2.9	4.2	6.0
Heating	Min-Max		kW	1.3 - 4.2	1.1 - 5.0	1.5 - 7.2
	Total Input	Rated	kW	0.803	1.076	1.617
	COP ^(*)			3.61	3.90	3.71
	Design load		kW	2.2	2.6	4.3
	Declared Capacity	at reference design temperature	kW	2.0 (-10°C)	2.3 (-10°C)	3.8 (-10°C)
		at bivalent temperature	kW	2.0 (-7°C)	2.3 (-7°C)	3.8 (-7°C)
		at operation limit temperature	kW	2.0 (-10°C)	2.3 (-10°C)	3.8 (-10°C)
	Back up heating capacity		kW	0.2	0.3	0.5
	Annual electricity consumption ^(*)		kWh/a	769	878	1501
	SCOP ^(*)			4.0	4.1	4.0
Operating	Energy efficiency class			A+	A+	A+
	Current(Max)		A	7.4	9.2	14.3
	Input (cooling / Heating)	Rated	kW	0.043	0.047	0.077
	Operating Current(Max)		A	0.62	0.65	0.82
	Dimensions	H*W*D	mm	200 - 790 - 700	200 - 990 - 700	200 - 990 - 700
	Weight		kg	18	22	25.5
	Air Volume (Lo-Mid-Hi)		m³/min	5.5 - 7 - 9	7 - 9 - 11	10 - 12.5 - 15
	External Static Pressure ^(*)		Pa	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>
	Sound Level (Lo-Mid-Hi) (SPL)	Rated	dB(A)	23 - 26 - 30	23 - 27 - 31	30 - 34 - 37
		5Pa ^(*)	dB(A)	22 - 25 - 29	22 - 26 - 30	29 - 33 - 36
Outdoor Unit	Sound Level (PWL)		dB(A)	50	51	57
	Dimensions	H*W*D	mm	550-800-285	550-800-285	714-800-285
	Weight		kg	30	35	41
	Air Volume	Cooling	m³/min	36.3	34.3	45.8
		Heating	m³/min	34.6	32.7	43.7
	Sound Level (SPL)	Cooling	dB(A)	45	48	48
		Heating	dB(A)	46	48	49
	Sound Level (PWL)	Cooling	dB(A)	59	59	64
	Operating Current(Max)		A	6.8	8.5	13.5
	Breaker Size		A	10	10	20
Ext. Piping	Diameter ^(*)	Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7
	Max.Length	Out-In	m	20	20	30
	Max.Height	Out-In	m	12	12	30
Guaranteed Operating Range (Outdoor)	Cooling ^(*)		°C	-10 ~ +46	-10 ~ +46	-15 ~ +46
	Heating		°C	-10 ~ +24	-10 ~ +24	-10 ~ +24

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 SEER/SCOP are measured at ESP 25Pa.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

*6 The factory setting of ESP is shown without < >.

*7 SPL measured at ESP 5Pa.