

R410A

MSZ-HJ25/35/50VA

MSZ-HJ60/71VA

# MSZ-H SERIES

Compact, high-performance indoor and outdoor units and advanced inverter technologies provide superior energy savings and comfort in all rooms.



## Stylish Design with Flat Panel Front

A stylish flat panel design is employed for the front of the indoor unit. The simple look matches room aesthetics.




## Advanced Inverter Control – Efficient Operation All the Time



Mitsubishi Electric's cutting-edge inverter technologies are adopted to provide automatic adjustment of operation load according to need. This reduces excessive consumption of electricity, and thereby realises an Energy Rank "A" rating for 25/35 classes and "A+" for 50/60/71 classes.

## Silent Operation

Quiet, relaxing space is within reach. Operational noise is a low 22dB (25/35 classes). Operation is so silent you might even forget the air conditioner is on.

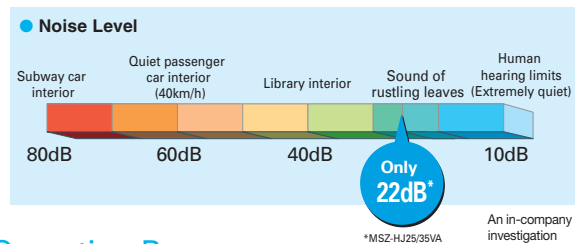


## Long Piping Length

Compared to previous models, the piping length is significantly increased, further enhancing the ease and flexibility of installation.

|                              | MSZ-HJ60/71 | MSZ-HJ25/35/50 | MSZ-HC |
|------------------------------|-------------|----------------|--------|
| Max piping length            | 30m         | 20m            | 10m    |
| Max piping height difference | 15m         | 12m            | 5m     |


## Operating Range

As a result of an extended operating range in cooling, these models accommodate a wider range of usage environments and applications than previous models.

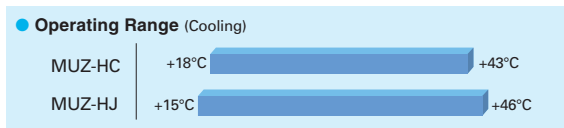


## Compact Units

The widths of both indoor and outdoor units are compact, making installation in smaller, tighter spaces possible.

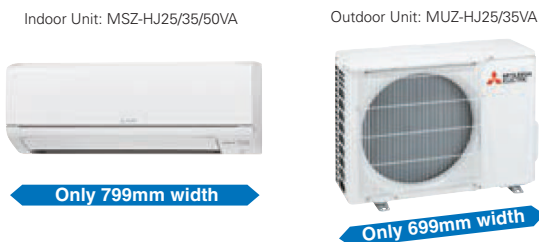

Compared to other models, width is down by 16%.

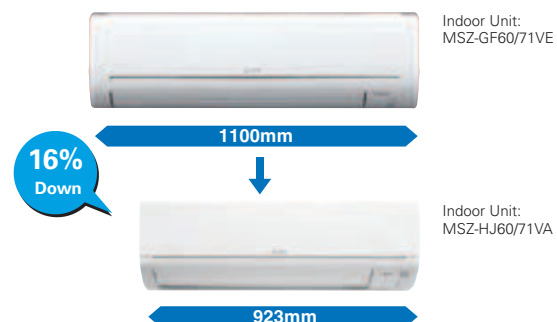

# MSZ-H SERIES



## Indoor Unit

R410A



MSZ-HJ25/35/50VA



MSZ-HJ60/71VA

## Outdoor Unit

R410A



MUZ-HJ25/35VA



MUZ-HJ50VA



MUZ-HJ60/71VA

## Remote Controller



| Type                                    | Inverter Heat Pump                            |                                 |                        |                        |                         |                          |                           |                           |
|---|---|---------------------------------|------------------------|------------------------|-------------------------|--------------------------|---------------------------|---------------------------|
| Indoor Unit                             | MSZ-HJ25VA                                    | MSZ-HJ35VA                      | MSZ-HJ50VA             | MSZ-HJ60VA             | MSZ-HJ71VA              |                          |                           |                           |
| Outdoor Unit                            | MUZ-HJ25VA                                    | MUZ-HJ35VA                      | MUZ-HJ50VA             | MUZ-HJ60VA             | MUZ-HJ71VA              |                          |                           |                           |
| Refrigerant                             | R410A <sup>(1)</sup>                          |                                 |                        |                        |                         |                          |                           |                           |
| Power Supply                            | Indoor Power supply<br>230V/Single/50Hz       |                                 |                        |                        |                         |                          |                           |                           |
| Cooling                                 | Design load                                   | kW                              | 2.5                    | 3.1                    | 5.0                     | 6.1                      | 7.1                       |                           |
|   | Annual electricity consumption <sup>(2)</sup> | kWh/a                           | 171                    | 212                    | 292                     | 354                      | 441                       |                           |
|   | SEER <sup>(2)</sup>                           |                                 | 5.1                    | 5.1                    | 6.0                     | 6.0                      | 5.6                       |                           |
|   | Energy efficiency class                       |                                 | A                      | A                      | A+                      | A+                       | A+                        |                           |
|   | Capacity                                      | Rated                           | kW                     | 2.5                    | 3.15                    | 5.0                      | 6.1                       | 7.1                       |
| Heating (Average Season) <sup>(3)</sup> | Design load                                   | kW                              | 1.9 (-10°C)            | 2.4 (-10°C)            | 3.8 (-10°C)             | 4.6 (-10°C)              | 5.4 (-10°C)               |                           |
|   | Declared Capacity                             | at reference design temperature | kW                     | 1.9 (-10°C)            | 2.4 (-10°C)             | 3.8 (-10°C)              | 4.6 (-10°C)               | 5.4 (-10°C)               |
|   | at bivalent temperature                       | kW                              | 1.9 (-10°C)            | 2.4 (-10°C)            | 3.8 (-10°C)             | 4.6 (-10°C)              | 5.4 (-10°C)               |                           |
|   | at operation limit temperature                | kW                              | 1.9 (-10°C)            | 2.4 (-10°C)            | 3.8 (-10°C)             | 4.6 (-10°C)              | 5.4 (-10°C)               |                           |
|   | Back up heating capacity                      | kW                              | 0.0 (-10°C)            | 0.0 (-10°C)            | 0.0 (-10°C)             | 0.0 (-10°C)              | 0.0 (-10°C)               |                           |
| Operating Current (Max)                 | Annual electricity consumption <sup>(2)</sup> | kWh/a                           | 698                    | 885                    | 1267                    | 1544                     | 1854                      |                           |
|   | SCOP <sup>(2)</sup>                           |                                 | 3.8                    | 3.8                    | 4.2                     | 4.1                      | 4.0                       |                           |
|   | Energy efficiency class                       |                                 | A                      | A                      | A+                      | A+                       | A+                        |                           |
|   | Capacity                                      | Rated                           | kW                     | 3.15                   | 3.6                     | 5.4                      | 6.8                       | 8.1                       |
|   | Total Input                                   | Rated                           | kW                     | 0.9 - 3.5              | 1.1 - 4.1               | 1.4 - 6.5                | 1.5 - 8.4                 | 1.5 - 8.5                 |
| Indoor Unit                             | Operating Current (Max)                       | A                               | 5.8                    | 6.5                    | 9.8                     | 12.5                     | 12.5                      |                           |
|   | Input   | Rated                           | kW                     | 0.020                  | 0.024                   | 0.037                    | 0.065                     | 0.065                     |
|   | Operating Current (Max)                       | A                               | 0.3                    | 0.3                    | 0.4                     | 0.5                      | 0.5                       |                           |
|   | Dimensions                                    | H*W*D                           | mm                     | 290-799-232            | 290-799-232             | 290-799-232              | 305-923-250               | 305-923-250               |
|   | Weight  | kg                              | 9                      | 9                      | 9                       | 13                       | 13                        |                           |
|   | Air Volume (SLo-Lo-Mid-Hi-SH <sup>(3)</sup> ) | Cooling                         | m <sup>3</sup> /min    | 3.8 - 5.5 - 7.3 - 9.5  | 3.8 - 5.7 - 7.8 - 10.9  | 6.3 - 9.1 - 11.1 - 12.9  | 9.3 - 12.2 - 15.0 - 19.9  | 10.0 - 12.2 - 15.0 - 19.9 |
|   | Heating                                       | m <sup>3</sup> /min             | 3.5 - 5.5 - 7.5 - 10.0 | 3.5 - 5.5 - 7.5 - 10.3 | 6.1 - 8.3 - 11.1 - 14.3 | 9.4 - 12.5 - 16.0 - 19.9 | 10.3 - 12.7 - 16.4 - 19.9 |                           |
|   | Sound Level (SPL)                             | Cooling                         | dB(A)                  | 22 - 30 - 37 - 43      | 22 - 31 - 38 - 45       | 28 - 36 - 40 - 45        | 31 - 38 - 44 - 50         | 33 - 38 - 44 - 50         |
|   | (SLo-Lo-Mid-Hi-SH <sup>(3)</sup> )            | Heating                         | dB(A)                  | 23 - 30 - 37 - 43      | 23 - 30 - 37 - 44       | 27 - 34 - 41 - 47        | 31 - 38 - 44 - 49         | 33 - 38 - 44 - 49         |
|   | Sound Level (PWL)                             | Cooling                         | dB(A)                  | 57                     | 60                      | 60                       | 65                        | 65                        |
| Outdoor Unit                            | Dimensions                                    | H*W*D                           | mm                     | 538-699-249            | 538-699-249             | 550-800-285              | 880-840-330               | 880-840-330               |
|   | Weight  | kg                              | 24                     | 25                     | 36                      | 55                       | 55                        |                           |
|   | Air Volume                                    | Cooling                         | m <sup>3</sup> /min    | 31.5                   | 31.5                    | 36.3                     | 47.9                      | 49.3                      |
|   | Heating                                       | m <sup>3</sup> /min             | 31.5                   | 31.5                   | 34.8                    | 47.9                     | 47.9                      |                           |
|   | Sound Level (SPL)                             | Cooling                         | dB(A)                  | 50                     | 50                      | 50                       | 55                        | 55                        |
|   | Heating                                       | dB(A)                           | 50                     | 50                     | 51                      | 55                       | 55                        |                           |
|   | Sound Level (PWL)                             | Cooling                         | dB(A)                  | 63                     | 64                      | 64                       | 65                        | 66                        |
|   | Operating Current (Max)                       | A                               | 5.5                    | 6.2                    | 9.4                     | 12.0                     | 12.0                      |                           |
|   | Breaker Size                                  | A                               | 10                     | 10                     | 12                      | 16                       | 16                        |                           |
|   | Ext. Piping                                   | Diameter                        | Liquid/Gas             | mm                     | 6.35/9.52               | 6.35/9.52                | 6.35/12.7                 | 6.35/15.88                |
| Max.Length                              |   | Out-In                          | m                      | 20                     | 20                      | 20                       | 30                        | 30                        |
| Max.Height                              |   | Out-In                          | m                      | 12                     | 12                      | 12                       | 15                        | 15                        |
| Guaranteed Operating Range (Outdoor)    | Cooling                                       | °C                              | +15 ~ +46              | +15 ~ +46              | +15 ~ +46               | +15 ~ +46                | +15 ~ +46                 |                           |
|   | Heating                                       | °C                              | -10 ~ +24              | -10 ~ +24              | -10 ~ +24               | -10 ~ +24                | -10 ~ +24                 |                           |

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SH: Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 51-52 for heating (warmer season) specifications.