

# MSZ-DW SERIES

R32

MSZ-DW25/35/50VF




Introducing an indoor unit that is compact yet packed with a variety of features. High energy saving performance and Air Purifying Filter bring you a comfortable indoor environment.

## Energy Saving



Mitsubishi Electric's inverter technologies are adopted to provide automatic adjustment of operation load according to need. This reduces excessive consumption of electricity, and thereby realises Energy Rank "A++" for SEER (cooling) and "A+" for SCOP (heating).

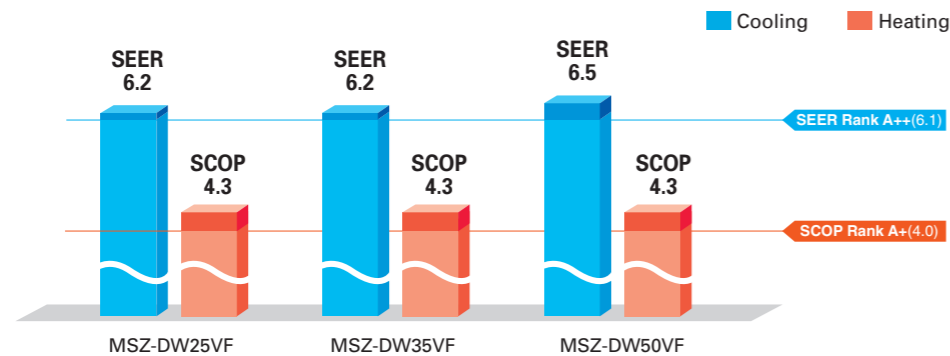

## Simple and Compact Design

The stylish design makes it a natural match for any room. The width of indoor units is compact, making installation in smaller, tighter spaces possible.



## Simple Control

The simple remote controller and functions provide the easy control solution and comforts of life.




## Wi-Fi and System Control

### Wi-Fi Interface (Optional)

Optional interface and a Cloud-based solution "MELCloud" enable users to control air conditioners and check operating status via devices such as laptops, tablets and smartphones.

### System Control Interface (Optional)

- Remote on/off operation is possible by input to the connector.
- Depending on the interface used, connecting a wired remote control such as the PAR-41MAA is possible.
- Centralised control is possible when connected to M-NET.

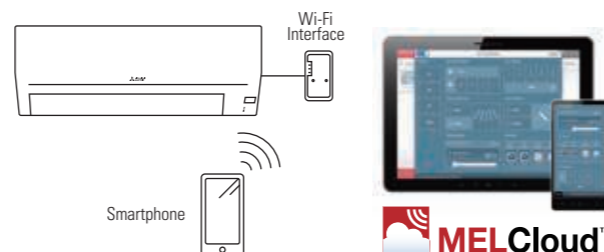

## Air Purifying Filter



Air Purifying Filter generates stable antibacterial, antifungal, and deodorant effects. The three-dimensional surface expands the filter's capture area and contributes to the better dust collection performance than conventional filters.



### MSZ-DW SERIES

#### Indoor Unit

R32

MSZ-DW25/35/50VF

#### Outdoor Unit

MUZ-DW25VF  
MUZ-DW35VF  
MUZ-DW50VF

#### Remote Controller

Type	Inverter Heat Pump		
Indoor Unit	MSZ-DW25VF	MSZ-DW35VF	MSZ-DW50VF
Outdoor Unit	MUZ-DW25VF	MUZ-DW35VF	MUZ-DW50VF
Refrigerant	R32 <sup>(1)</sup>		
Power Source	Outdoor Power supply		
Supply	Outdoor (V / Phase / Hz)		
Cooling	Design load	kW	2.5
	Annual electricity consumption <sup>(2)</sup>	kWh/a	135
	SEER <sup>(3)</sup>		6.2
	Energy efficiency class		A++
	Capacity	kW	2.5
Heating (Average Season) <sup>(4)</sup>	Design load	kW	1.9 (-10°C)
	Declared Capacity	kW	1.9 (-10°C)
	Back up heating capacity	kW	0.0 (-10°C)
	Annual electricity consumption <sup>(2)</sup>	kWh/a	618
	SCOP <sup>(3)</sup>		4.3

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO<sub>2</sub>, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.  
 (2) The GWP of R32 is 675 in the IPCC 4th Assessment Report.  
 (3) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.  
 (4) SH: Super High  
 (5) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".  
 (6) Please see page 53-55 for heating (warmer season) specifications.