



ENERG
енергия · ενεργεια




Indoor unit
Outdoor unit

E*SD-*M2/6/9*D
PXZ-4F75VG



55 °C

35 °C

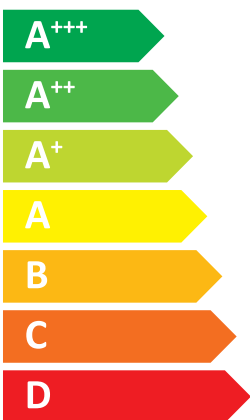

A⁺

A⁺⁺



41 dB



67 dB

■ 05
■ **06**
■ 06
kW

■ 05
■ **06**
■ 07
kW



2019

811/2013

DG79V334H01



PRODUCT FICHE

Mitsubishi Electric Erp Directive Related Product Information: erp.mitsubishielectric.eu/erp
Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
This information is based on EU regulation No 811/2013 and No 813/2013.

DG79A02NH02

1.SPACE HEATER		For medium-temperature application															For low-temperature application										
1	2	3	6	8	11	9	13	15	16	21	22	17	18	25	4	6	8	11	9	13	15	16	21	22	17	18	25
Outdoor unit	Indoor unit	Medium-temperature application															Low-temperature application										
		Seasonal space heating energy efficiency class	Rated heat output under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	For space heating, annual energy consumption under average climate conditions	Sound power level L _{WA} , indoor	Rated heat output under colder climate conditions	Rated heat output under warmer climate conditions	Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	For space heating, annual energy consumption under colder climate conditions	For space heating, annual energy consumption under warmer climate conditions	Sound power level L _{WA} , outdoor	Seasonal space heating energy efficiency class	Rated heat output under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	For space heating, annual energy consumption under average climate conditions	Sound power level L _{WA} , indoor	Rated heat output under colder climate conditions	Rated heat output under warmer climate conditions	Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	For space heating, annual energy consumption under colder climate conditions	For space heating, annual energy consumption under warmer climate conditions	Sound power level L _{WA} , outdoor		
		kW	%	kWh	dB	kW	kW	%	%	kWh	kWh	kWh	dB		kW	%	kWh	dB	kW	kW	%	%	kWh	kWh	kWh	dB	
PXZ-4F75VG	EHSD-****D	✓	A+	6	113	4335	41	5	6	97	147	5136	2244	67	✓	A++	6	154	3212	41	5	7	132	199	3805	1800	67
	ERSD-****D	✓	A+	6	113	4335	41	5	6	97	147	5136	2244	67	✓	A++	6	154	3212	41	5	7	132	199	3805	1800	67

2.COMBINATION HEATER		For medium-temperature application																							For low-temperature application																						
1	2	3	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25		
Outdoor unit	Indoor unit	Medium-temperature application																							Low-temperature application																						
		Declared load profile	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating: annual energy consumption under average climate conditions	For water heating: annual energy consumption under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level L _{WA} , indoor	Work only during off-peak hours	Rated heat output under colder climate conditions	Rated heat output under warmer climate conditions	For space heating: annual energy consumption under colder climate conditions	For water heating: annual energy consumption under colder climate conditions	For space heating: annual energy consumption under warmer climate conditions	For water heating: annual energy consumption under warmer climate conditions	Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	For space heating: annual energy consumption under colder climate conditions	For water heating: annual energy consumption under colder climate conditions	For space heating: annual energy consumption under warmer climate conditions	For water heating: annual energy consumption under warmer climate conditions	Sound power level L _{WA} , outdoor	Low-temperature application	Declared load profile	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating: annual energy consumption under average climate conditions	For water heating: annual energy consumption under average climate conditions	For space heating: annual energy consumption under colder climate conditions	For water heating: annual energy consumption under colder climate conditions	For space heating: annual energy consumption under warmer climate conditions	For water heating: annual energy consumption under warmer climate conditions	Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	For space heating: annual energy consumption under colder climate conditions	For water heating: annual energy consumption under colder climate conditions	For space heating: annual energy consumption under warmer climate conditions	For water heating: annual energy consumption under warmer climate conditions	Sound power level L _{WA} , outdoor					
PXZ-4F75VG	EHST17D-****D	✓	L	A+	A+	6	4335	936	113	117	41	-	-	5	6	5136	2244	1256	776	97	147	86	144	67	✓	L	A++	A+	6	3212	936	154	117	41	-	5	7	3805	1800	1256	776	132	199	86	144	67	
	ERST17D-****D	✓	L	A+	A+	6	4335	936	113	117	41	-	-	5	6	5136	2244	1256	776	97	147	86	144	67	✓	L	A++	A++	A+	6	3212	936	154	117	41	-	5	7	3805	1800	1256	776	132	199	86	144	67
	EHST20D-****D	✓	L	A+	A+	6	4335	922	113	124	41	-	-	5	6	5136	2244	1573	784	97	147	71	149	67	✓	L	A++	A+	A+	6	3212	922	154	124	41	-	5	7	3805	1800	1573	784	132	199	71	149	67
	ERST20D-****D	✓	L	A+	A+	6	4335	922	113	124	41	-	-	5	6	5136	2244	1573	784	97	147	71	149	67	✓	L	A++	A+	A+	6	3212	922	154	124	41	-	5	7	3805	1800	1573	784	132	199	71	149	67
	EHST30D-****D	✓	XL	A+	A	6	4335	1530	113	118	41	-	-	5	6	5136	2244	1835	1246	97	147	98	151	67	✓	XL	A++	A	A	6	3212	1530	154	118	41	-	5	7	3805	1800	1835	1246	132	199	98	151	67
	ERST30D-****D	✓	XL	A+	A	6	4335	1530	113	118	41	-	-	5	6	5136	2244	1835	1246	97	147	98	151	67	✓	XL	A++	A++	A	6	3212	1530	154	118	41	-	5	7	3805	1800	1835	1246	132	199	98	151	67

	English	Deutsch	Franglais	Italiano	Español
	Nederlands	Svenska	Dansk	Português	Ελληνικά
	suomi	Cestina	Български	Polski	Ελληνικά
	Outdoor unit	Außengerät	unité extérieure	unidad exterior	Εξωτερική μονάδα
	1 buiteneenh	Utomhusenhet	Удлендс ентред	unidad exterior	-
	Ulkokotusko	Venkovni jednotka	Външно тѣло	jednostka zewnętrzna	-
	Indoor unit	Innengerät	unité intérieure	unidad interior	Εσωτερική μονάδα
	2 binnenunit	Innhusenhet	Внутреннее ентред	unidad interior	-
	Sisäyksisko	Unität jednotka	Внутреннее тѣло	jednostka wewnętrzna	-
	Medium-temperature application	Mittelprematur anwendung	l'application à moyenne température	la aplicación a media temperatura	la aplicación de media temperatura
	3 middletemperatuur-toepassing	Mittelprematuranapplikation	middletemperatuurtoepassing	la aplicación a media temperatura	η εφαρμογή σε μέση θερμοκρασία
	kesäilmastoprofilian sovellus	Stiefenprofilan applikace	среднотемпературного приложения	zastosowania w średniej temperaturze	-
	Low-temperature application	Niedertemperaturapplikation	l'application à basse température	la aplicación a bassa temperatura	la aplicación de baja temperatura
	4 lage temperatuur-toepassing	Lage temperaturapplikation	l'application à basse température	la aplicación a bassa temperatura	η εφαρμογή σε χαμηλή θερμοκρασία
	matalämpötilan sovellus	nizkotemperaturní aplikace	низкотемпературни приложения	zastosowania w niskiej temperaturze	-
	Declared load profile	Aangegeven Lastprofiel	Profil de souillure déclaré	Perfil de carga declarado	Προφίλ de carga declarado
	5 Oorgegeven capaciteitsprofiel	Deklaarerd belastingsprofiel	Ардуєтн формуджиспрофїл	Declaratıon profil dozdzen	-
	Imoitetu kuormitusprofiili	Deklaaratu zaťažovú profil	Оваєтн товара профїл	A classe de eficiência energética	la clase de eficiencia energética
	6 de seizoensgebonden energie-efficiëntieklasse voor ruimteverwarming	de seizoensgebonden energie-efficiëntieklasse voor ruimteverwarming	la classe d'efficacité énergétique saisonnière pour le chauffage des locaux	A classe de eficiencia energética do aquecimento ambiente sazonal	η τάξη ενεργειακής απόδοσης της εποχιακής θερμότητας χώρου
	tlälmittimäksäa vuorokauden energiakäytökäluokkia	tlälmittimäksen kaustatusten energiakäytökäluokkia	la classe d'efficacité énergétique saisonnière pour le chauffage de l'eau	A classe de eficiencia energética do aquecimento de água	η τάξη ενεργειακής απόδοσης της εποχιακής θερμότητας νερού
	7 Water heating energy efficiency class	Water heating energy efficiency class	la classe d'efficacité énergétique pour le chauffage de l'eau	A classe de eficiencia energética do aquecimento de água	η τάξη ενεργειακής απόδοσης της εποχιακής θερμότητας νερού
	de energie-efficiëntieklasse voor ruimteverwarming	de energie-efficiëntieklasse voor ruimteverwarming	Klassen for atmosfærisk effektivitet ved varmerumvarmning	A classe de eficiencia energética do aquecimento de água	η τάξη ενεργειακής απόδοσης της εποχιακής θερμότητας νερού
	vedelämmityksen energiakäytökäluokkia	vedelämmityksen energiakäytökäluokkia	Klassen for atmosfærisk effektivitet ved varmerumvarmning	A classe de eficiencia energética do aquecimento de água	η τάξη ενεργειακής απόδοσης της εποχιακής θερμότητας νερού
	Rated heat output under average climate conditions	Rated heat output under average climate conditions	la puissance thermique nominale dans les conditions climatiques moyennes	A potência calorífica nominal em condições climáticas médias	η ονομαστική θερμική ισχύς υπό μέσους κλιματικούς συνθήκες
	8 de nominale varmeafgifte under gennemsnitlige klimaatforholdene	de nominale varmeafgifte under gennemsnitlige klimaatforholdene	la puissance thermique nominale dans les conditions climatiques moyennes	A potência calorífica nominal em condições climáticas médias	-
	rimittälämpöteho/keskimääräisissä ilmastio-olosuhteissa	rimittälämpöteho/keskimääräisissä ilmastio-olosuhteissa	la puissance thermique nominale dans les conditions climatiques moyennes	A potência calorífica nominal em condições climáticas médias	-
	For space heating annual energy consumption under average climate conditions	For space heating annual energy consumption under average climate conditions	pour le chauffage des locaux, la consommation annuelle d'énergie(dans les conditions climatiques moyennes)	per il riscaldamento d'ambiente, il consumo annuo di energia(in condizioni climatiche medie)	para calefnta espacios, el consumo anual de energía en condiciones climáticas más favorables
	9 voor ruimteverwarming, het jaarlijkse energieverbruik onder gemiddelde klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse energieverbruik onder gemiddelde klimaatomstandigheden	for roomheating, the annual energy consumption under average climate conditions	la classe de eficiencia energética estacional de calefacción	η ετήσια κατανάλωση ενέργειας υπό χειρότερες κλιματικές συνθήκες
	tlälmittimäksäa vuorokauden energiakäytökäluokkia	tlälmittimäksen kaustatusten energiakäytökäluokkia	for roomheating, the annual energy consumption under average climate conditions	la classe de eficiencia energética estacional de calefacción	η ετήσια κατανάλωση ενέργειας υπό χειρότερες κλιματικές συνθήκες
	10 For water heating, annual electricity consumption under average climate conditions	For water heating, annual electricity consumption under average climate conditions	pour le chauffage de l'eau, la consommation annuelle d'électricité(dans les conditions climatiques moyennes)	per il riscaldamento dell'acqua, il consumo annuo di elettricità(in condizioni climatiche medie)	για την θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας(υπό μέσους κλιματικές συνθήκες)
	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder gemiddelde klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder gemiddelde klimaatomstandigheden	for vandvarmning, årlig elforbrug(under gennemsnitlige klimaatforhold)	para o aquecimento de água, o consumo anual de electricidade(em condições climáticas médias)	για την θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας(υπό μέσους κλιματικές συνθήκες)
	11 de seizoensgebonden energie-efficiëntie voor ruimteverwarming(onder gemiddelde klimaatomstandigheden)	de seizoensgebonden energie-efficiëntie voor ruimteverwarming(onder gemiddelde klimaatomstandigheden)	la puissance thermique nominale dans les conditions climatiques moyennes	A classe de eficiencia energética do aquecimento ambiente sazonal(em condições climáticas médias)	η ετήσια κατανάλωση ενέργειας υπό χειρότερες κλιματικές συνθήκες
	tlälmittimäksen kaustatusten energiakäytökäluokkia	tlälmittimäksen kaustatusten energiakäytökäluokkia	la puissance thermique nominale dans les conditions climatiques moyennes	A classe de eficiencia energética do aquecimento ambiente sazonal(em condições climáticas médias)	-
	Water heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	l'efficacité énergétique pour le chauffage de l'eau(dans les conditions climatiques moyennes)	la eficiencia energética de la calefacción en condiciones climáticas medias	η ενεργειακή απόδοση της θέρμανσης νερού(υπό μέσους κλιματικές συνθήκες)
	12 de energie-efficiëntie voor waterverwarming(onder gemiddelde klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming(onder gemiddelde klimaatomstandigheden)	energieefficiëntie van waterverwarming(under gemiddeltlige klimaatforholdene)	A eficiência energética do aquecimento de água(em condições climáticas médias)	η ενεργειακή απόδοση της θέρμανσης νερού(υπό μέσους κλιματικές συνθήκες)
	vedelämmityksen energiakäytökäluokkia	vedelämmityksen energiakäytökäluokkia	energiatallisuus vedenlämmityksen osalta(under gemiddeltlige klimaatforholdene)	A eficiência energética do aquecimento de água(em condições climáticas médias)	-
	13 Sound power level L _{WA} indoor	het geluidsvormingsniveau L _{WA} binnen	le niveau de puissance acoustique L _{WA} à l'intérieur	el nivel de potencia acústica L _{WA} al interior	el nivel de potencia acústica L _{WA} en interiores
	ääniteho L _{WA} sisällä	Luudefektivä L _{WA} i inomhus	le niveau de puissance acoustique L _{WA} à l'inter	O nível de potência sonora L _{WA} no interior	η στάθμη ηχητικής ισχύος L _{WA} εσωτερικού χώρου
	Work only during off-peak hours	Arbejd kun i de daler	travail uniquement pendant les heures creuses	funciona solamente durante las horas de baja demanda	λειτουργεί μόνο εκτός των ωρών αιχμής
	14 tommen anpassad tillbrukstiden i skovmiljø	toimen ajan sovellettu käyttöaika	travail uniquement pendant les heures creuses	funciona solamente durante las horas de baja demanda	-
	Rated heat output under colder climate conditions	Rated heat output under colder climate conditions	la puissance thermique nominale dans les conditions climatiques plus froides	A potência calorífica nominal em condições climáticas mais frias	η potencia calorífica nominal en condiciones climáticas más frías
	15 de nominale varmeafgifte, under koldere klimaatomstandigheden	de nominale varmeafgifte, under koldere klimaatomstandigheden	la puissance thermique nominale dans les conditions climatiques plus froides	A potência calorífica nominal em condições climáticas mais frias	η ονομαστική θερμική ισχύς υπό χειρότερες κλιματικές συνθήκες
	Rated heat output under warmer climate conditions	Rated heat output under warmer climate conditions	la puissance thermique nominale dans les conditions climatiques plus chaudes	A potência calorífica nominal em condições climáticas mais quentes	η potencia calorífica nominal en condiciones climáticas más calidas
	16 de nominale varmeafgifte, under varmere klimaatomstandigheden	de nominale varmeafgifte, under varmere klimaatomstandigheden	la puissance thermique nominale dans les conditions climatiques plus chaudes	A potência calorífica nominal em condições climáticas mais quentes	η ονομαστική θερμική ισχύς υπό χειρότερες κλιματικές συνθήκες
	For space heating annual energy consumption under colder climate conditions	For space heating annual energy consumption under colder climate conditions	pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus froides	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più fredde	para calefnta espacios, el consumo anual de energía en condiciones climáticas más frías
	17 voor ruimteverwarming, het jaarlijkse energieverbruik onder koudere klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse energieverbruik onder koudere klimaatomstandigheden	for roomheating, the annual energy consumption under average climate conditions	la clase de eficiencia energética estacional de calefacción	η ετήσια κατανάλωση ενέργειας υπό χειρότερες κλιματικές συνθήκες
	tlälmittimäksäa vuorokauden energiakäytökäluokkia	tlälmittimäksen kaustatusten energiakäytökäluokkia	for roomheating, the annual energy consumption under average climate conditions	la clase de eficiencia energética estacional de calefacción	η ετήσια κατανάλωση ενέργειας υπό χειρότερες κλιματικές συνθήκες
	For space heating annual energy consumption under warmer climate conditions	For space heating annual energy consumption under warmer climate conditions	pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus chaudes	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più calde	para calefnta espacios, el consumo anual de energía en condiciones climáticas más calidas
	18 voor ruimteverwarming, het jaarlijkse energieverbruik onder varmere klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse energieverbruik onder varmere klimaatomstandigheden	for roomheating, the annual energy consumption under average climate conditions	la clase de eficiencia energética estacional de calefacción	η ετήσια κατανάλωση ενέργειας υπό χειρότερες κλιματικές συνθήκες
	tlälmittimäksäa vuorokauden energiakäytökäluokkia	tlälmittimäksen kaustatusten energiakäytökäluokkia	for roomheating, the annual energy consumption under average climate conditions	la clase de eficiencia energética estacional de calefacción	η ετήσια κατανάλωση ενέργειας υπό χειρότερες κλιματικές συνθήκες
	For water heating, annual energy consumption under colder climate conditions	For water heating, annual energy consumption under colder climate conditions	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides	per il riscaldamento dell'acqua, il consumo annuo di elettricità, in condizioni climatiche più fredde	para calefnta agua, el consumo anual de electricidad en condiciones climáticas más frías
	19 voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden	for vandvarmning, årlig elforbrug under koldere klimaatforhold	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais frias	για θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας υπό χειρότερες κλιματικές συνθήκες
	vedelämmityksäa vuorokauden energiakäytökäluokkia	vedelämmityksen kaustatusten energiakäytökäluokkia	for vandvarmning, årlig elforbrug under koldere klimaatforhold	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais frias	-
	For water heating, annual energy consumption under warmer climate conditions	For water heating, annual energy consumption under warmer climate conditions	for vandvarmning, årlig elforbrug under koldere klimaatforhold	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais frias	-
	20 voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder varmere klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder varmere klimaatomstandigheden	for vandvarmning, årlig elforbrug under koldere klimaatforhold	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais frias	-
	vedelämmityksäa vuorokauden energiakäytökäluokkia	vedelämmityksen kaustatusten energiakäytökäluokkia	for vandvarmning, årlig elforbrug under koldere klimaatforhold	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais frias	-
	Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under colder climate conditions	la puissance thermique nominale dans les conditions climatiques plus froides	A eficiência energética do aquecimento ambiente sazonal em condições climáticas mais frias	η ετήσια κατανάλωση ενέργειας υπό χειρότερες κλιματικές συνθήκες
	21 de seizoensgebonden energie-efficiëntie voor ruimteverwarming onder koudere klimaatomstandigheden	de seizoensgebonden energie-efficiëntie voor ruimteverwarming onder koudere klimaatomstandigheden	la puissance thermique nominale dans les conditions climatiques plus froides	A eficiência energética do aquecimento ambiente sazonal em condições climáticas mais frias	-
	tlälmittimäksen kaustatusten energiakäytökäluokkia	tlälmittimäksen kaustatusten energiakäytökäluokkia	la puissance thermique nominale dans les conditions climatiques plus froides	A eficiência energética do aquecimento ambiente sazonal em condições climáticas mais frias	-
	Seasonal space heating energy efficiency under warmer climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	la puissance thermique nominale dans les conditions climatiques plus chaudes	A eficiência energética do aquecimento ambiente sazonal em condições climáticas mais quentes	η ετήσια κατανάλωση ενέργειας υπό χειρότερες κλιματικές συνθήκες
	22 de seizoensgebonden energie-efficiëntie voor ruimteverwarming onder varmere klimaatomstandigheden	de seizoensgebonden energie-efficiëntie voor ruimteverwarming onder varmere klimaatomstandigheden	la puissance thermique nominale dans les conditions climatiques plus chaudes	A eficiência energética do aquecimento ambiente sazonal em condições climáticas mais quentes	-
	tlälmittimäksen kaustatusten energiakäytökäluokkia	tlälmittimäksen kaustatusten energiakäytökäluokkia	la puissance thermique nominale dans les conditions climatiques plus chaudes	A eficiência energética do aquecimento ambiente sazonal em condições climáticas mais quentes	-
	Water heating energy efficiency under colder climate conditions	Water heating energy efficiency under colder climate conditions	l'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus froides	la eficiencia energética de la calefacción en condiciones climáticas más frías	η ενεργειακή απόδοση της θέρμανσης νερού υπό χειρότερες κλιματικές συνθήκες
	23 de energie-efficiëntie voor waterverwarming onder koudere klimaatomstandigheden	de energie-efficiëntie voor waterverwarming onder koudere klimaatomstandigheden	l'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus froides	la eficiencia energética de la calefacción en condiciones climáticas más frías	-
	vedelämmityksen energiakäytökäluokkia	vedelämmityksen energiakäytökäluokkia	l'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus froides	la eficiencia energética de la calefacción en condiciones climáticas más frías	-
	Water heating energy efficiency under warmer climate conditions	Water heating energy efficiency under warmer climate conditions	l'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	la eficiencia energética de la calefacción en condiciones climáticas más calidas	η ενεργειακή απόδοση της θέρμανσης νερού υπό χειρότερες κλιματικές συνθήκες
	24 de energie-efficiëntie voor waterverwarming onder varmere klimaatomstandigheden	de energie-efficiëntie voor waterverwarming onder varmere klimaatomstandigheden	l'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	la eficiencia energética de la calefacción en condiciones climáticas más calidas	-
	vedelämmityksen energiakäytökäluokkia	vedelämmityksen energiakäytökäluokkia	l'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	la eficiencia energética de la calefacción en condiciones climáticas más calidas	-
	Sound power level L _{WA} outdoor	het geluidsvormingsniveau L _{WA} buiten	le niveau de puissance acoustique L _{WA} à l'extérieur	el nivel de potencia acústica L _{WA} al exterior	el nivel de potencia acústica L _{WA} en exteriores
	25 het geluidsvormingsniveau L _{WA} buiten	Luudefektivä L _{WA} ulkona	le niveau de puissance acoustique L _{WA} à l'extérieur	O nível de potência sonora L _{WA} no exterior	η στάθμη ηχητικής ισχύος L _{WA} εξωτερικού χώρου
	ääniteho L _{WA} ulkona	hädellä akustisellä voimalla L _{WA} ulkona	le niveau de puissance acoustique L _{WA} à l'extérieur	O nível de potência sonora L _{WA} no exterior	-

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-4F75VG
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.1	kW	Seasonal space heating energy efficiency	ηs	113	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	5.4	kW	Tj = - 7 °C	COPd	1.57	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 2 °C	Pdh	3.6	kW	Tj = + 2 °C	COPd	3.04	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 °C	Pdh	2.3	kW	Tj = + 7 °C	COPd	3.96	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = +12 °C	Pdh	1.5	kW	Tj = +12 °C	COPd	4.51	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = bivalent temperature	Pdh	5.4	kW	Tj = bivalent temperature	COPd	1.57	-
Tj = operation limit temperature (***)	Pdh	4.5	kW	Tj = operation limit temperature (***)	COPd	1.33	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	-10	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	Psup	1.6	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2562	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 67	dB(A)				
Annual energy consumption	Q _{HE}	4335	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details

MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD.

700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier:



 Tadashi SAITO
 Manager, Quality Assurance Department
 THAILAND

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-4F75VG
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.1	kW	Seasonal space heating energy efficiency	ηs	154	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	5.4	kW	Tj = - 7 °C	COPd	2.44	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	4.08	-
Tj = + 2 °C	Pdh	3.3	kW	Tj = + 7 °C	COPd	5.07	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	5.51	-
Tj = + 7 °C	Pdh	2.2	kW	Tj = bivalent temperature	COPd	2.44	-
Degradation co-efficient (**)	Cdh	0.97	-	Tj = operation limit temperature (***)	COPd	2.31	-
Tj = +12 °C	Pdh	1.6	kW	Operation limit temperature	TOL	-20	°C
Degradation co-efficient (**)	Cdh	0.95	-	Heating water operating limit temperature	WTOL	55	°C
Tj = bivalent temperature	Pdh	5.4	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	5.0	kW	Rated heat output (*)	Psup	1.1	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-10	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2562	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 67	dB(A)				
Annual energy consumption	Q _{HE}	3212	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details

MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD.

700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier;

 Tadashi SAITO
 Manager, Quality Assurance Department
 THAILAND

The signature is signed in the average climate / medium-temperature section.

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-4F75VG
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.2	kW	Seasonal space heating energy efficiency	ηs	97	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	3.2	kW	Tj = - 7 °C	COPd	2.20	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 °C	COPd	2.98	-
Tj = + 2 °C	Pdh	1.9	kW	Tj = + 7 °C	COPd	4.33	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 °C	COPd	6.12	-
Tj = + 7 °C	Pdh	1.8	kW	Tj = bivalent temperature	COPd	2.34	-
Degradation co-efficient (**)	Cdh	0.96	-	Tj = operation limit temperature (***)	COPd	1.00	-
Tj = +12 °C	Pdh	1.5	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.00	-
Degradation co-efficient (**)	Cdh	0.94	-	Operation limit temperature	TOL	-20	°C
Tj = bivalent temperature	Pdh	3.2	kW	Heating water operating limit temperature	WTOL	55	°C
Tj = operation limit temperature (***)	Pdh	3.5	kW	Supplementary heater			
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	4.2	kW	Rated heat output (*)	Psup	5.2	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2562	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 67	dB(A)				
Annual energy consumption	Q _{HE}	5136	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details

MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD.

700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier;

Tadashi SAITO

The signature is signed in the average climate / medium-temperature section.

Manager, Quality Assurance Department

THAILAND

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P_{designh}, and the rated heat output of a supplementary heater P_{sup} is equal to the supplementary capacity for heating sup(T_j).

 (**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0.9.

 (***) If the declared TOL is lower than the T_{designh} of the considered climate then the outdoor dry bulb temperature T_j is equal to T_{designh}.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-4F75VG
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.2	kW	Seasonal space heating energy efficiency	η_s	132	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	3.2	kW	Tj = - 7 °C	COPd	3.15	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 °C	Pdh	1.9	kW	Tj = + 2 °C	COPd	3.90	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = + 7 °C	Pdh	1.8	kW	Tj = + 7 °C	COPd	5.25	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = +12 °C	Pdh	1.7	kW	Tj = +12 °C	COPd	6.73	-
Degradation co-efficient (**)	Cdh	0.94	-				
Tj = bivalent temperature	Pdh	3.2	kW	Tj = bivalent temperature	COPd	3.30	-
Tj = operation limit temperature (***)	Pdh	4.0	kW	Tj = operation limit temperature (***)	COPd	1.69	-
Tj = – 15 °C (if TOL < – 20 °C)	Pdh	4.2	kW	Tj = – 15 °C (if TOL < – 20 °C)	COPd	2.18	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	-22	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	Psup	5.2	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable		Rated air flow rate, outdoors	-	2562	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 67	dB(A)			
Annual energy consumption	Q _{HE}	3805	kWh			

For heat pump combination heater:

Declared load profile	-		Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh			
Annual electricity consumption	AEC	-	kWh			

Contact details

MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD.

700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier;

Tadashi SAITO
Manager, Quality Assurance Department
THAILAND

The signature is signed in the average climate / medium-temperature section.

Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-4F75VG
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.3	kW	Seasonal space heating energy efficiency	η_s	147	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = + 2 °C	Pdh	6.3	kW	Tj = + 2 °C	COPd	1.94	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 7 °C	Pdh	4.1	kW	Tj = + 7 °C	COPd	3.21	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +12 °C	Pdh	1.8	kW	Tj = +12 °C	COPd	5.16	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = bivalent temperature	Pdh	6.3	kW	Tj = bivalent temperature	COPd	1.94	-
Tj = operation limit temperature (***)	Pdh	6.3	kW	Tj = operation limit temperature (***)	COPd	1.94	-
Bivalent temperature	Tbiv	2	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	2	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	Psup	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable		Rated air flow rate, outdoors	-	2562	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 67	dB(A)			
Annual energy consumption	Q _{HE}	2244	kWh			

For heat pump combination heater:

Declared load profile	-		Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh			
Annual electricity consumption	AEC	-	kWh			

Contact details

MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD.

700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier;

 Tadashi SAITO
 Manager, Quality Assurance Department
 THAILAND

The signature is signed in the average climate / medium-temperature section.

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-4F75VG
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.1	kW	Seasonal space heating energy efficiency	η_s	113	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	5.4	kW	Tj = - 7 °C	COPd	1.57	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 2 °C	Pdh	3.6	kW	Tj = + 2 °C	COPd	3.04	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 °C	Pdh	2.3	kW	Tj = + 7 °C	COPd	3.96	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = +12 °C	Pdh	1.5	kW	Tj = +12 °C	COPd	4.51	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = bivalent temperature	Pdh	5.4	kW	Tj = bivalent temperature	COPd	1.57	-
Tj = operation limit temperature (***)	Pdh	4.5	kW	Tj = operation limit temperature (***)	COPd	1.33	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	-10	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	1.6	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2562	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 67	dBA				
Annual energy consumption	Q _{HE}	4335	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details

MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD.

700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier:



 Tadashi SAITO
 Manager, Quality Assurance Department
 THAILAND

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-4F75VG
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.1	kW	Seasonal space heating energy efficiency	η_s	154	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	5.4	kW	Tj = - 7 °C	COPd	2.44	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 °C	Pdh	3.3	kW	Tj = + 2 °C	COPd	4.08	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 7 °C	Pdh	2.2	kW	Tj = + 7 °C	COPd	5.07	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = +12 °C	Pdh	1.6	kW	Tj = +12 °C	COPd	5.51	-
Degradation co-efficient (**)	Cdh	0.95	-				
Tj = bivalent temperature	Pdh	5.4	kW	Tj = bivalent temperature	COPd	2.44	-
Tj = operation limit temperature (***)	Pdh	5.0	kW	Tj = operation limit temperature (***)	COPd	2.31	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	-10	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	Psup	1.1	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2562	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 67	dBA				
Annual energy consumption	Q _{HE}	3212	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details

MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier;

Tadashi SAITO
Manager, Quality Assurance Department
THAILAND

The signature is signed in the average climate / medium-temperature section.

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-4F75VG
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.2	kW	Seasonal space heating energy efficiency	ηs	97	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	3.2	kW	Tj = - 7 °C	COPd	2.20	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 °C	Pdh	1.9	kW	Tj = + 2 °C	COPd	2.98	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 7 °C	Pdh	1.8	kW	Tj = + 7 °C	COPd	4.33	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = +12 °C	Pdh	1.5	kW	Tj = +12 °C	COPd	6.12	-
Degradation co-efficient (**)	Cdh	0.94	-				
Tj = bivalent temperature	Pdh	3.2	kW	Tj = bivalent temperature	COPd	2.34	-
Tj = operation limit temperature (***)	Pdh	3.5	kW	Tj = operation limit temperature (***)	COPd	1.00	-
Tj = – 15 °C (if TOL < – 20 °C)	Pdh	4.2	kW	Tj = – 15 °C (if TOL < – 20 °C)	COPd	1.00	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	-22	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	Psup	5.2	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2562	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 67	dBA				
Annual energy consumption	Q _{HE}	5136	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details

MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD.	700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand
The identification and signature of the person empowered to bind the supplier;	
The signature is signed in the average climate / medium-temperature section.	
Tadashi SAITO Manager, Quality Assurance Department THAILAND	

• Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

• Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-4F75VG
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.2	kW	Seasonal space heating energy efficiency	η_s	132	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	3.2	kW	Tj = -7 °C	COPd	3.15	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +2 °C	COPd	3.90	-
Tj = +2 °C	Pdh	1.9	kW	Tj = +7 °C	COPd	5.25	-
Degradation co-efficient (**)	Cdh	0.97	-	Tj = +12 °C	COPd	6.73	-
Tj = +7 °C	Pdh	1.8	kW	Tj = bivalent temperature	COPd	3.30	-
Degradation co-efficient (**)	Cdh	0.96	-	Tj = operation limit temperature (***)	COPd	1.69	-
Tj = +12 °C	Pdh	1.7	kW	Tj = -15 °C (if TOL < -20 °C)	COPd	2.18	-
Degradation co-efficient (**)	Cdh	0.94	-	Operation limit temperature	TOL	-20	°C
Tj = bivalent temperature	Pdh	3.2	kW	Heating water operating limit temperature	WTOL	55	°C
Tj = operation limit temperature (***)	Pdh	4.0	kW	Supplementary heater			
Tj = -15 °C (if TOL < -20 °C)	Pdh	4.2	kW	Rated heat output (*)	Psup	5.2	kW
Bivalent temperature	Tbiv	-7	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2562	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 67	dBA				
Annual energy consumption	Q _{HE}	3805	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details

MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD.	700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand
The identification and signature of the person empowered to bind the supplier;	
The signature is signed in the average climate / medium-temperature section.	
	Tadashi SAITO Manager, Quality Assurance Department THAILAND

* Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

* Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-4F75VG
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.3	kW	Seasonal space heating energy efficiency	ηs	147	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = + 2 °C	Pdh	6.3	kW	Tj = + 2 °C	COPd	1.94	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 7 °C	Pdh	4.1	kW	Tj = + 7 °C	COPd	3.21	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = +12 °C	Pdh	1.8	kW	Tj = +12 °C	COPd	5.16	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = bivalent temperature	Pdh	6.3	kW	Tj = bivalent temperature	COPd	1.94	-
Tj = operation limit temperature (***)	Pdh	6.3	kW	Tj = operation limit temperature (***)	COPd	1.94	-
Bivalent temperature	Tbiv	2	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	2	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	Psup	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2562	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 67	dBA				
Annual energy consumption	Q _{HE}	2244	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details

MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD.	700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand
The identification and signature of the person empowered to bind the supplier;	Tadashi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	THAILAND

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-4F75VG
	Indoor unit:	ERSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.8	kW	Seasonal space heating energy efficiency	ηs	199	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = + 2 °C	Pdh	6.8	kW	Tj = + 2 °C	COPd	2.80	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 °C	Pdh	4.4	kW	Tj = + 7 °C	COPd	4.72	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	1.9	kW	Tj = +12 °C	COPd	6.40	-
Degradation co-efficient (**)	Cdh	0.95	-				
Tj = bivalent temperature	Pdh	6.8	kW	Tj = bivalent temperature	COPd	2.80	-
Tj = operation limit temperature (***)	Pdh	6.8	kW	Tj = operation limit temperature (***)	COPd	2.80	-
Bivalent temperature	Tbiv	2	°C	Operation limit temperature	TOL	-20	°C
Reference design conditions for space heating	Tdesignh	2	°C	Heating water operating limit temperature	WTOL	55	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	Psup	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW	Type of energy input	Electrical		
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2562	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 67	dBA				
Annual energy consumption	Q _{HE}	1800	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details

MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD.	700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand
The identification and signature of the person empowered to bind the supplier;	Tadashi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	THAILAND

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PXZ-4F75VG
	Indoor unit:	EHSD-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.8	kW	Seasonal space heating energy efficiency	ηs	199	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = + 2 °C	COPd	2.80	-
Tj = + 2 °C	Pdh	6.8	kW	Tj = + 7 °C	COPd	4.72	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 °C	COPd	6.40	-
Tj = + 7 °C	Pdh	4.4	kW	Tj = bivalent temperature	COPd	2.80	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	2.80	-
Tj = +12 °C	Pdh	1.9	kW	Operation limit temperature	TOL	-20	°C
Degradation co-efficient (**)	Cdh	0.95	-	Heating water operating limit temperature	WTOL	55	°C
Tj = bivalent temperature	Pdh	6.8	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	6.8	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	°C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	°C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.015	kW				
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	2562	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 67	dBA				
Annual energy consumption	Q _{HE}	1800	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh				
Annual electricity consumption	AEC	-	kWh				

Contact details

MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD.

700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier;

 Tadashi SAITO
 Manager, Quality Assurance Department
 THAILAND

The signature is signed in the average climate / medium-temperature section.

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(T_j).

 (**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0.9.

 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature T_j is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.